

10/24/00



10-25-00

A

| | | |
|---|------------------------|---|
| UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b)) | Attorney Docket No. | 68139769-200100 |
| | First Inventor | Christian Volf Olgaard et al. |
| | Title | SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR FACILITATING USER INTERFACE ROAMING IN AN INTERFACE ROAMING NETWORK FRAMEWORK |
| | Express Mail Label No. | EL563098659US |

| APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i> | ADDRESS TO: Commissioner for Patents Box Patent Application Washington DC 20231 |
|--|--|
| 1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) | 5. <input type="checkbox"/> Microfiche Computer Program (<i>Appendix</i>) |
| 2. <input checked="" type="checkbox"/> Specification [Total Pages 46 with cover] (preferred arrangement as set forth below) <ul style="list-style-type: none">• Descriptive Title of the Invention• Cross References to Related Applications• Statement Regarding Fed Sponsored R & D• Reference to Microfiche Appendix• Background of the Invention• Brief Description of the Drawings (<i>if filed</i>)• Detailed Description• Claim(s)• Abstract of the Disclosure | 6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (<i>if applicable, all necessary</i>) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies |
| 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 8] | ACCOMPANYING APPLICATION PARTS <ul style="list-style-type: none">7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))8. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney9. <input type="checkbox"/> English Translation Document (<i>if applicable</i>)10. <input type="checkbox"/> Information Disclosure Statement PTO-1449 <input type="checkbox"/> Copies of IDS Citations11. <input type="checkbox"/> Preliminary Amendment12. <input checked="" type="checkbox"/> Return Report Postcard (MPEP 503)13. <input type="checkbox"/> Small Entity Statement <input type="checkbox"/> Statement filed in prior application, status still proper14. <input type="checkbox"/> Certified Copy of Priority Document(s)15. <input type="checkbox"/> Other: |
| 4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 2] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/division with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b) | |

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____ / _____

Prior application information: Examiner:

Group Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

Baker & McKenzie
Two Embarcadero Center, Suite 2400
San Francisco, CA 94111-3909
Telephone: (415) 576-3000
Facsimile: (415) 576-3099
Customer No.: 24276

By:

Vid Bhakar

Registration No. 42,323

Date:

10-24-00

FEE TRANSMITTAL**For FY 2001***Patent Fees are subject to annual revision.**Complete if Known***TOTAL AMOUNT OF PAYMENT (\$539)**

| | |
|-----------------------|-------------------------------|
| Application Number | NEW |
| Filing Date | HEREWITH |
| First Named Inventor | Christian Volf Olgaard et al. |
| Examiner Name | Not Yet Assigned |
| Group Art Unit | Not Yet Assigned |
| Attorney Document No. | 68139769-200100 |

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

50-0974

BAKER & MCKENZIE

Deposit Account Number & Deposit Account Name

- ☒ Charge any additional fees required under 37 CFR §§ 1.16 and 1.17

- ☒ Applicant claims small entity status.

2. ☒ **Payment Enclosed:**

☒ Check ☐ Money Order ☐ Other

FEE CALCULATION**1. BASIC FILING FEE**

| LARGE ENTITY | | SMALL ENTITY | | Fee Description | Fee Paid |
|---------------------|----------|--------------|----------|-----------------|--------------|
| Fee Code | Fee (\$) | Fee Code | Fee (\$) | | |
| 101 | 710 | 201 | 355 | Utility | 355 |
| 106 | 320 | 206 | 160 | Design | |
| 107 | 490 | 207 | 245 | Plant | |
| 108 | 710 | 208 | 355 | Reissue | |
| 114 | 150 | 214 | 75 | Provisional | |
| SUBTOTAL (1) | | | | | \$355 |

2. EXTRA CLAIM FEES

| | Extra Claims | Fee from below | Fee Paid |
|---------------|--------------|----------------|--------------|
| Total Claims | 36 - 20 ** | = 16 | x 9 = \$ 144 |
| Independent | 3 - 3 | = 0 | x * = \$ 0 |
| Multiple Dep. | | * | = \$ * |

** or number previously paid, if greater; for Reissues, see below:

| Large Entity | | Small Entity | | Fee Description |
|--------------|----------|--------------|----------|--|
| Fee Code | Fee (\$) | Fee Code | Fee (\$) | |
| 103 | 18 | 203 | 9 | Claim in excess of 20 |
| 102 | 80 | 202 | 40 | Independent claims in excess of 3 |
| 104 | 270 | 204 | 135 | Multiple dependent claim, if not paid |
| 109 | 80 | 209 | 40 | ** Reissue ind. claims over original patent |
| 110 | 18 | 210 | 9 | ** Reissue claims in excess of 20 and over original patent |

FEE CALCULATION (continued)**3. Additional Fees**

| Large Entity | | Small Entity | | Fee Description | Fee Paid |
|--------------|----------|--------------|----------|---|----------|
| Fee Code | Fee (\$) | Fee Code | Fee (\$) | | |
| 105 | 130 | 205 | 65 | Surcharge - late filing fee or oath | |
| 127 | 50 | 227 | 25 | Surcharge - late provisional filing fee | |
| 139 | 130 | 139 | 130 | Non-English specification | |
| 147 | 2520 | 139 | 2520 | Filing a request for re-examination | |
| 112 | 920* | 112 | 920* | Req. publ. of SIR prior to Ex. Action | |
| 113 | 1840* | 113 | 1840* | Requesting publication of SIR after Examiner action | |
| 115 | 110 | 215 | 55 | Extension for reply within 1 st mo. | |
| 116 | 390 | 216 | 195 | Extension for reply within 2 nd mo. | |
| 117 | 890 | 217 | 445 | Extension for reply within 3 rd mo. | |
| 118 | 1390 | 218 | 695 | Extension for reply within 4 th mo. | |
| 128 | 1890 | 228 | 945 | Extension for reply with 5 th mo. | |
| 119 | 310 | 219 | 155 | Notice of Appeal | |
| 120 | 310 | 220 | 155 | Filing a brief in support of an appeal | |
| 121 | 270 | 221 | 135 | Request for oral hearing | |
| 138 | 1510 | 138 | 1510 | Pet to institute a public use proceeding | |
| 140 | 110 | 240 | 55 | Petition to revive - unavoidable | |
| 141 | 1240 | 241 | 620 | Petition to revive - unintentional | |
| 142 | 1240 | 242 | 620 | Utility issue fee (or reissue) | |
| 143 | 440 | 243 | 220 | Design issue fee | |
| 144 | 600 | 244 | 300 | Plant issue fee | |
| 122 | 130 | 122 | 130 | Petitions to the Commissioner | |
| 123 | 50 | 123 | 50 | Petition related to provisional apps. | |
| 126 | 240 | 126 | 240 | Submission of IDS Statement | |
| 581 | 40 | 581 | 40 | Recording each patent assignment per property (x no. of properties) | 40 |
| 146 | 710 | 246 | 355 | Filing a submission after final rej. | |
| 149 | 710 | 249 | 355 | For each add'l. invention to be examined (37 C.F.R. § 1.129(b)) | |

Other fee (specify):

*Reduced by Basic Filing Fee Paid **SUBTOTAL (3)****\$40****SUBMITTED BY**

Baker & McKenzie
Two Embarcadero Center, Suite 2400
San Francisco, CA 94111
Telephone: (415) 576-3000
Facsimile: (415) 576-3099
Customer No. 24276

Date: 10-24-00

By: V. Bhakar
 Vid Bhakar, Reg. No. 42,323

5

U.S. PATENT APPLICATION ENTITLED:

10

**SYSTEM, METHOD AND ARTICLE OF
MANUFACTURE FOR FACILITATING
USER INTERFACE ROAMING IN AN
INTERFACE ROAMING NETWORK
FRAMEWORK**

15

INVENTORS:

Christian V. Olgaard
Spiros N. Bouas
Rick W. Umstattd
Benny Madsen

20

25

30

BAKER & MCKENZIE
Two Embarcadero Center
Twenty-fourth Floor
San Francisco, California 94111-3909
Telephone (415) 576-3000

SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR FACILITATING USER INTERFACE ROAMING IN AN INTERFACE ROAMING NETWORK FRAMEWORK

5

INVENTORS:

Christian V. Olgaard
Spiros N. Bouas
Rick W. Umstattd
Benny Madsen

10

FIELD OF THE INVENTION

The present invention relates generally to hybrid networks and, more particularly, to a
15 network framework for facilitating interface roaming.

BACKGROUND OF THE INVENTION

As wireless communication is moving from being voice centric to data centric, the
20 need to move towards devices that are more integrated are being pursued. People
are creating smart phones, which integrate PDA functionality and a larger display
with a cell phone, or people are trying to integrate cell phone (voice & data)
functionality into a pocket sized PDA. The goal of most of these efforts is to offer
the user a wireless Internet experience. However, this integration effort is difficult,
25 as the user on the one expects a small form factor cell phone, but at the same time
expect a full graphical internet experience when surfing the net, and a large display
is required to offer an acceptable experience. Therefore, existing integration efforts
are making a trade off between size and graphical experience (display size).

SUMMARY OF THE INVENTION

A system, method and article of manufacture are provided for facilitating user interface roaming in an interface roaming network framework. Received from a wireless link is a list of usable interface clients in proximity to the wireless link. Each usable interface client has functional capabilities associated with it. One of the interface clients is selected from the list and the wireless link is notified of the selected interface client. A connection is then initiated with the selected interface client and an application is executed based on the capabilities of the selected interface client in order to generate content. The generated content is then transmitted to the interface client so that the content may be displayed using the interface client.

In an embodiment of the present invention, a notification may be received from the wireless link upon activation indicating that the wireless link has been activated. Upon activation, the wireless link may determine the usable interface clients in its proximity. In another embodiment of the present invention, information may be received that was input by the user in response to the generated content.

Subsequent content may then be generated based on the received information and then transmitted to the interface client for display. In one aspect of such an embodiment, the information from the user may be input into the wireless link which then transmits the information to the server.

In an aspect of the present invention, the connection with the selected interface client may be initiated via the wireless link. In another aspect of the present invention, the generated content may be transmitted to the interface client via the wireless link. In a further aspect of the present invention, each interface client includes a visual display for displaying the content. In yet another aspect of the present invention, the wireless link may receive the content if no usable interface clients are proximate to the wireless link (i.e., the list of usable interface clients includes zero usable

interface clients in proximity to the wireless link). In an additional aspect of the present invention, the wireless link and the interface client are may be capable of communicating utilizing Internet protocols such as TCP/IP or IPX protocols. In a further aspect of the present invention, the wireless link may have telephony capabilities so that it may be used as a mobile telephone.

In one embodiment of the present invention, a notification may be received that another or second interface client better suited for displaying the content is proximate to the wireless link. The user may then be queried as to whether the user would like to switch to the second interface client or remain with the currently used interface client. In one aspect of the such an embodiment, the query may be displayed on the current interface client. If a response to the query is received from the user indicating that the user wants to switch to the second interface client, subsequently generated content is then generated based on the capabilities of the second interface client and then transmitted to the second interface client for display thereon.

In yet a further embodiment of the present invention, a user may input information into the wireless link whereupon the information is only transmitted to the server by the wireless link when a connection between the server and the wireless link is available. In another embodiment of the present invention, execution of an application based on capabilities of the selected interface client may further require uploading from a data store information relating to configuring the application based on the capabilities of the selected interface client.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features, aspects and advantages are better understood from the following detailed description, appended claims, and accompanying drawings
5 where:

Figure 1 is a schematic diagram of an interface roaming network framework in accordance with an embodiment of the present invention;

10 Figure 2 is a flowchart of a process for facilitating user interface roaming in an interface roaming network framework in accordance with an embodiment of the present invention;

15 Figure 3 is a flowchart of a process for utilizing a wireless link in an interface roaming network in accordance with an embodiment of the present invention;

Figure 4 is a flowchart for a process for utilizing an interface client in an interface roaming network in accordance with an embodiment of the present invention;

20 Figure 5 is a schematic diagram illustrating a normal mode of operation in accordance with an embodiment of the present invention;

25 Figure 6 is a schematic diagram illustrating a mode of operation where no external interface client is available in accordance with an embodiment of the present invention;

Figure 7 is a schematic diagram illustrating a mode of operation where there is no infrastructure connection from the wireless link to the infrastructure server but where there is access to an interface client proximal to the wireless link in accordance with
30 an embodiment of the present invention;

Figure 8 is a schematic diagram of a mode of operation wherein there is no connection to infrastructure from the wireless link and no external interface client access in accordance with an embodiment of the present invention;

- 5 Figure 9 is a schematic diagram of some possible exemplary modes for interface roaming when the interface client has its own connection to the server in accordance with an embodiment of the present invention;

- 10 Figure 10 is a schematic diagram of an illustrative system with a plurality of components in accordance with an embodiment of the present invention;

Figure 11 is a schematic diagram of a representative hardware environment in accordance with an embodiment of the present invention.

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

DETAILED DESCRIPTION

User interface roaming may generally be defined as the ability to move from one interface (input and output device) and move to another interface while either: (1) maintaining the status of the application(s) and being able to continue from where the previous device was left – even if the interface capabilities change, or (2) changing the status of the application(s) and being able to use a new application based on the capabilities of the new interface client.

10 To solve the problem of having a small cell phone be able to create a sufficient graphical interface to enable a web surfing experience, a system is disclosed that enables interface roaming. Users utilize interface devices (“interface clients”) external to the actual communication engine. This enables use of a small communication device (such as a mobile phone or a wireless personal digital assistant (“PDA”)) while maintaining the ability to present a graphical interface on a display separate from the device. The interface client may be any display which is close or proximate to the user and the user’s communication device. The system will select the best-suited display available to the user.

20 At least two embodiments exist: (1) an embodiment where a connection between an interface client and an infrastructure server is made via a wireless link; and (2) an embodiment where a pre-existing connection exists between an interface client and an infrastructure server.

25 In an embodiment where the connection is made between an interface client and an application via a wireless link, a user carries a wireless link (such as, for example, a mobile phone-like device) and this wireless link creates a connection to the interface client near the user and creates a connection from the wireless link to the application or infrastructure server. In such an embodiment, the wireless link may be considered to act as a gateway with added functionality. The handling of the display of an application on the interface is primarily controlled from and by the infrastructure

server. In a preferred embodiment, the wireless link may include personal identification information associated with the user and provide ways to encrypt the data to different extents, for example, from simple encryption to offering a wireless VPN connection.

5

In an embodiment where a connection between an interface client and an infrastructure server is made using an existing link, the interface client is already connected (wired or wireless) directly to the infrastructure server without communication through the wireless link. In such an embodiment, the user does not need a wireless link since the interface client can already make a connection to the infrastructure server. However, in such an embodiment, a user-identification associated with the user may be required to identify the user to the system. The user-identification may be provided as part of the wireless link's own electronic identification, or any other usable identification method. As a further feature in this embodiment, the interface client can communicate to the infrastructure server not only through its own link, but it can also go through the user's wireless link if available (for example if highly sensitive data must be transferred).

10

15

20

25

In general applications are primarily executed by the infrastructure server. This makes an interface client serve as an intelligent thin client, that performs the interface translation functions of the application run by the infrastructure server. It is the infrastructure server that modifies the interface appearance to match the capabilities of the selected interface client. What makes this possible is a protocol that allows the interface client to communicate to the infrastructure server via the most suitable connection available and visa versa.

30

Figure 1 is a schematic diagram of an interface roaming network framework 100 in accordance with an embodiment of the present invention. In this framework 100, a wireless link 102 is provided which may be connected to an infrastructure server 104 via a network 106. The wireless link 102 may (or may not) include a visual display and an input device may also have (optionally) telephony capability. The network

106 may be any sort of network, such as a LAN, a WAN, or even the Internet, and may include a wireless network portion **108** which is in communication with the wireless link.

5 The framework **100** also includes a plurality of variously located interface clients **110a, 110b, 110c, 110d, 110e, 110f, 110g**. An interface client includes a processor and preferably has some sort of visual display (e.g. display **112**) such as, for example, a monitor or a television. An interface client may also include some sort of input device (e.g., keyboard **114**) for inputting information and commands. Some of
10 the interface clients (e.g., interface clients **110d, 110g**) in the framework **100** may also be directly connected to the network **106** to permit communication via the network between the interface client and the infrastructure server **104**.

Each interface client preferably also includes a transceiver **116** for communicating
15 with the wireless link (and the infrastructure server via the wireless link) by, for example, infrared or RF signals. The wireless link may also have a proximal range **118** within which interface clients (e.g., interface clients **110a, 110b, 110c, 110d**) are considered within the proximity of the wireless link and outside of which interface clients (e.g., interface clients **110e, 110f, 110g**) are considered outside the
20 proximity of the wireless link. It should be noted that communication between the wireless link and interface clients need not be limited to interface clients inside the proximal range – the range of communication between the wireless link and an interface client may be greater than the proximal range. The proximal range is simply a range inside of which interface clients are considered proximate to the
25 wireless link (and thereby proximate to a user of the wireless link).

With continuing reference to Figure 1, the interface server **104** may also be connected to a data store/database **120** in which application data and configuration data relating to the various types of interface clients may be stored.

Figure 2 is a flowchart of a process 200 for facilitating user interface roaming in an interface roaming network framework in accordance with an embodiment of the present invention. In operation 202, a list of usable interface clients in proximity to a wireless link is received from the wireless link. Each usable interface client has functional capabilities associated with it. In operation 204, one of the interface clients is selected from the list and the wireless link is notified of the selected interface client in operation 206. A connection is then initiated with the selected interface client in operation 208 and an application is executed based on the capabilities of the selected interface client in order to generate content in operation 210. In operation 212, the generated content is then transmitted to the interface client so that the content may be displayed using the interface client.

In an embodiment of the present invention, a notification may be received from the wireless link upon activation indicating that the wireless link has been activated. Upon activation, the wireless link may determine the usable interface clients in its proximity. In another embodiment of the present invention, information may be received that was input by the user in response to the generated content. Subsequent content may then be generated based on the received information and then transmitted to the interface client for display. In one aspect of such an embodiment, the information from the user may be input into the wireless link which then transmits the information to the server.

In an aspect of the present invention, the connection with the selected interface client may be initiated via the wireless link. In another aspect of the present invention, the generated content may be transmitted to the interface client via the wireless link. In a further aspect of the present invention, each interface client includes a visual display for displaying the content. In yet another aspect of the present invention, the wireless link may receive the content if no usable interface clients are proximate to the wireless link (i.e., the list of usable interface clients includes zero usable interface clients in proximity to the wireless link). In an additional aspect of the present invention, the wireless link and the interface client are may be capable of

communicating utilizing Internet protocols such as TCP/IP or IPX protocols. In a further aspect of the present invention, the wireless link may have telephony capabilities so that it may be used as a mobile telephone.

5 In one embodiment of the present invention, a notification may be received that another or second interface client better suited for displaying the content is proximate to the wireless link. The user may then be queried as to whether the user would like to switch to the second interface client or remain with the currently used interface client. In one aspect of the such an embodiment, the query may be
10 displayed on the current interface client. If a response to the query is received from the user indicating that the user wants to switch to the second interface client, subsequently generated content is then generated based on the capabilities of the second interface client and then transmitted to the second interface client for display thereon.

15 In yet a further embodiment of the present invention, a user may input information into the wireless link whereupon the information is only transmitted to the server by the wireless link when a connection between the server and the wireless link is available. In another embodiment of the present invention, execution of an
20 application based on capabilities of the selected interface client may further require uploading from a data store information relating to configuring the application based on the capabilities of the selected interface client.

Figure 3 is a flowchart of a process 300 for utilizing a wireless link in an interface
25 roaming network in accordance with an embodiment of the present invention. A wireless link is utilized in operation 302 to scan a vicinity of the wireless link to detect one or more interface clients in the vicinity. In operation 304, the wireless link then transmits to an infrastructure server information relating to the interface clients detected in the vicinity. Based on the transmitted information, the
30 infrastructure server then selects one of the interface clients. Subsequently, the wireless link receives a notification from the infrastructure server of the selected

interface client in operation 306 and, in operation 308, a connection between the infrastructure server and the selected interface client is initiated for communication therebetween.

- 5 In an embodiment of the present invention, the wireless link may, upon activation, transmit an activation notification to the infrastructure server prior to scanning the vicinity for interface clients to indicate to the infrastructure server that the wireless link is activated. In another embodiment of the present invention, the wireless link may periodically scan the vicinity utilizing the wireless link to detect additional
- 10 interface clients, and, if an additional interface client is detected in the vicinity of the wireless link, notify the infrastructure server of the detection of the additional interface client(s). Subsequently, the wireless link may receive a query from the infrastructure server as to whether the user of the wireless link wants to connect to the additional interface client. The wireless link may include a display for displaying
- 15 the query to the user and an input device for permitting the user to input an answer to the query for subsequent transmission from the wireless link to the infrastructure server.

- In an aspect of the present invention, wherein the infrastructure server and the
- 20 selected interface client are connected for communication via the wireless link. In an additional aspect of the present invention, the scanning of the vicinity to detect one or more interface clients may include receiving a signal from each interface client in the vicinity of the wireless link. In another embodiment of such an aspect, the wireless link may first transmit an initial signal in the vicinity for receipt by
- 25 interface clients in the vicinity whereby the signals received by the wireless link from the interface clients in the vicinity of the wireless link are transmitted by the interface clients in response to the initial signal from the wireless link.

- In a further aspect of the present invention, the information relating to the interface
- 30 clients detected in the vicinity may include information relating the capabilities of the detected interface clients. The information may also include information relating

to the locations of the detected information. In one embodiment, the information may be transmitted to the infrastructure server from the wireless link is provided to the wireless link by the interface clients. In yet another embodiment of the present invention, formatting information may be received by the wireless link from the

5 infrastructure server. The wireless link may then subsequently receive content from the infrastructure server. The wireless link may format the content based on the received formatting information and then transmit the formatted information to the interface client so that the formation information may be displayed by the interface client. As an option, the formatted content may be encrypted by the wireless link
10 prior to transmission to the interface client so that only the interface client can access the formatted content.

Figure 4 is a flowchart for a process 400 for utilizing an interface client in an interface roaming network in accordance with an embodiment of the present
15 invention. In general, an interface client in the interface roaming network submits information about the interface client to a wireless link in vicinity to the interface client in operation 402. The interface client may then subsequently receive content in operation 404 and display the content on a display in operation 406.

20 In an embodiment of the present invention, an interface client may receive a signal from the wireless link when the wireless link is in the vicinity of the interface client prior to submitting the information about the interface client to the wireless link. In one such embodiment, the signal from the wireless link may be transmitted from the wireless link in response to a prior signal transmitted from the interface client. Also,
25 the signal from the wireless link may include information identifying a user of the wireless link.

In an aspect of the present invention, the information about the interface client may include: information about the capabilities of the interface client, information about
30 display capabilities of the interface client, information about an input device of the interface client, and/or information about the location of the interface client. In

another embodiment of the present invention, the content may be received from an infrastructure server. In one such embodiment, the content may be received from the infrastructure server via the wireless link. In another such embodiment the interface client may be connected to the infrastructure server via its own connection and not
5 through the wireless link. In another aspect of the present invention, the content may be formatted based on the submitted information about the interface client.

Connection Via A User's Wireless Link

As mentioned above, a personal device **102** may be carried by a user to perform a
10 link between the interface client close to the user and the infrastructure. By separating the display and input interface from this device (possibly leaving a small simple display on the device), it will enable a desired small form-factor of the user's device. One may think of this as an extended cell phone, but it may likely be more like a gateway or router that communicate with the wireless infrastructure that also
15 includes a cell phone functionality. The cell phone operation may just be one of many functions that the device serve, and the actual cell phone functionality may be implemented as a wireless head set communicating with the communications device. In the following portion of the specification, the wireless link device **102** may be denoted as a "LitePoint" or simply as a "wireless link".

20 A functionality of this device is be its ability to roam with different interface clients that it connects to using a short-range wireless connection. This functionality may be implemented with hardware creating the wireless link (the wireless link) and by a protocol that can service roaming and can manage a multiple of interface clients.

25 When a wireless link **102** is activated, it will connect to the infrastructure server **104** to inform of its activation and also scan for usable interface clients in its proximity. As mentioned earlier, the wireless link may include a rudimentary interface. This interface may only offer minimum functionality and may be similar to a graphic
30 enabled display of a cell phone. In use, a wireless link periodically searches to find available interface clients in its vicinity. It then generate a list of the possible

interface clients and reports this list to the infrastructure server **104**. This list may include various information about the interface client, its display capabilities, its input devices, and the device's geographical location. The infrastructure server then recommends/selects one of the interface clients, and the wireless link contacts the interface client and initiates a connection. From this point on, the user of the wireless link device is able to interact with the interface client. Since the infrastructure server knows the capabilities of the interface client, the infrastructure server can format the user experience to make best use of the interface client's capabilities.

In one embodiment, the infrastructure server may run the application including the display and only transmit the data to the interface client. In another embodiment, the infrastructure server may upload a small program (script, client, etc.) either to the wireless link or to the actual interface client. The infrastructure server then communicates with this program using a low bandwidth protocol, and the program (e.g., interface driver program) formats the infrastructure server generated contents for the interface client.

It is likely that the user experience may change significantly as the interface changes. For example, if one is composing an email on a full screen graphical environment like a normal computer, the user interface is expected to be similar to the well-known computer user interface. If a smaller screen is used and no keyboard is available, it may change to a pen input based interface (the pen input portion may even reside on the wireless link), and if the device is the minimal interface of the wireless link, the user interface may change to become voice operated. Since the interface client reports to the infrastructure server its capabilities, the infrastructure server can upload different interface driver programs to the device to adapt to the user interface if needed. As an option, the most used interface driver programs may reside in the wireless link **102** or an interface client. Since the infrastructure server has access to the wireless link and the interface client, it has the ability to update the interface driver program if needed.

In a preferred embodiment, the applications are running on the infrastructure server, and the wireless link operates more like a thin client device, that still has the ability to execute programs and store data on its own. The wireless link may communicate with the infrastructure server using any high-speed wireless connection, but a protocol for this communication may be designed to enable the described operation, and at the same time geared towards low bandwidth and acceptable latency performance. Similarly, the connection between the wireless link and the external interface client can be any wireless protocol that can provide the sufficient throughput and latency requirement. A standard like Bluetooth or a derivative of this may suffice for the communication between the wireless link and the interface client.

An important aspect of the system may be its ability to roam between interface clients, and maintain the exact point the session was terminated. For example, the user may be receiving stock marked news via voice (i.e., text2voice on the infrastructure server) using the build-in user interface on the wireless link. When a better external interface client is in reach, the infrastructure server may ask the user if he/she wants to switch to the other interface client. As this interface client may allow the user to select specific news-stories using a graphical interface, it is likely that the user may want to switch. The switch may be initiated such that the user may be viewing the story that was presented by the text-voice on the infrastructure server.

The cursor may even be exactly where the reading was terminated at the time of the switch. To make this possible the wireless link may need maintain some information about the application presented to the interface client. If there are no significant changes in the interface client, the system may automatically be able to continue, but if a major change in the interface client's capability is encountered, the wireless link may need to send its information back to the infrastructure server, and the infrastructure server may then convert the stored scenario to fit the new interface client. This assumes that the wireless link serves the interface client (executes the

interface driver program). In the case that the interface client executes the interface driver program, the wireless link must inform the infrastructure server that a new interface client is being connected.

- 5 The following portion of the specification discusses four possible modes of operation: (1) a normal first mode, (2) a second mode where there is no external interface client, (3) a third mode where there is no infrastructure connection but there is access to a local or proximal interface client, and (4) a fourth mode where there is no connection to infrastructure and no external interface client access.

10

Figure 5 is a schematic diagram illustrating a normal mode 500 of operation in accordance with an embodiment of the present invention. In this first mode, the wireless link device 102 is connected to both the infrastructure server 104 through the wireless infrastructure 108 and to an external interface client 110 via a

15 transceiver 116. Examples of locations where such a mode may exist include be a hotel room, in a train, in a car (with display) or at the airport. The applications are controlled by the infrastructure server 104, and the wireless link 102 is similar to a smart thin client.

- 20 Figure 6 is a schematic diagram illustrating a second mode 600 of operation where no external interface client is available in accordance with an embodiment of the present invention. This is very similar to the first mode in that the wireless link device is in communication with the infrastructure server 104 via the wireless network 108 except that the wireless link device 102 utilizes its own built-in
- 25 interface. Examples of scenarios where this mode may exist include use of the wireless link walking on the street, sitting in a fishing boat, or driving in a car. The operation is similar to the operation in the normal mode with the application being run by the infrastructure server and the wireless link acting as a thin client.

- 30 Figure 7 is a schematic diagram illustrating a third mode 700 of operation where there is no infrastructure connection from the wireless link to the infrastructure

server but where there is access to an interface client proximal to the wireless link in accordance with an embodiment of the present invention. In this third mode, the wireless link **102** is not able to connect to the infrastructure but has access to an external interface client **110** via the transceiver **116**.

5

Examples of this could be in an airplane, in a car outside the wireless coverage area. In this scenario, the functionality of the wireless link **102** may be limited to built-in applications and applications downloaded from the infrastructure server **104** when the wireless link was last connected to the server. Some user data may be available and can be synchronized with the main data residing at the infrastructure server upon reconnection. Some illustrative built-in applications may include scheduler/calendar and address book as well as entertainment applications like games and music recording and/or playing capabilities. The external interface client **110** can be used to improve the user experience by providing a more capable visual display for the viewing the application (such as, for example, when playing a game on an airplane or when examining the user's schedule). This may not result in the absolute optimal user experience since the wireless link is controlling the interface client and may have limited memory, processing capabilities, and power supply (i.e., being battery powered).

10

15

20

Figure **8** is a schematic diagram of a fourth mode **800** of operation wherein there is no connection to infrastructure from the wireless link and no external interface client access in accordance with an embodiment of the present invention. In this scenario the wireless link **102** may act like a standard personal digital assistant (PDA) where the vital applications such as a scheduler/calendar application and an address book application as well as other entertainment applications may be available and can be accessed using the built-in interface of the wireless link **102**. This mode may be utilized in areas with no wireless coverage and no access to an external interface client.

25

30

It is important to understand that the system is controlled from the infrastructure server 104 and that all primary data resides on the infrastructure server (or accessible from the data store. Because of this, the data may always be up to date when the user accesses it, and it may also be possible to update data and applications automatically. It may also enable cooperation to have secure links to inside a firewall using technology like virtual private networks (VPN). This way the company solves the problem of the user having stored sensitive data on a laptop or a home computer. It also ensures that the available data and applications are always fully up to date.

One could also envision a scenario where the interface client contacts the infrastructure server using a user's wireless link. This could be to send a picture back to the infrastructure server, to report mal functions, or to inform the infrastructure server that a certain interface capability is available, and the infrastructure server can then initiate contact to the user through this device.

The wireless link can be seen as a communication engine that enables the link between the interface client and the infrastructure server whenever it is available. The communication in setting up a connection could be implemented as follows:

Establishing a connection between the infrastructure server and the wireless link may happen by the existing system protocols used in the particular wireless infrastructure. The requirement is to be able to provide a connection like TCP/IP or similar connection between the infrastructure server and the wireless link. A higher-level protocol is defined allowing the infrastructure server control the wireless link device and other interface clients connected to the wireless link using relative low bandwidth. The communication between the wireless link and an interface client is also important. Again, a standard communication protocol can be used such as Bluetooth. Bluetooth is capable of supporting the scanning for other devices, so it may be able to detect other interface client while communicating with the selected interface client.

First, the device must detect the different interface clients in its vicinity. This can be initiated either by the wireless link or by the interface client. Having the wireless link initiate the communication may drain more power from the battery powered wireless link, but having the interface clients initiate the communication is likely to result in increased interference when multiple devices are trying to contact a wireless link device. If the wireless link is the device initiating the connection, it may send out a beacon, and await the interface clients reporting their presence.

On the other hand, if the interface clients are the one initiating the connection, they may send out a beacon, and the wireless link may listen for such beacons. When a beacon is received, the wireless link may acknowledge its presence, and the two devices may start to interchange relevant information. Among other information, the interface client may report its capabilities. This can be in the form of an ID-type or directly its capabilities like display resolution, sound capability, input devices etc. It may also include information not directly related to the technical information of the interface client like its location etc. This information is reported back to the infrastructure server, or adopted by the wireless link. From this point on the infrastructure server has identified the user, the presence and capabilities of the interface client. The infrastructure server formats the interface client to fit the user's preferences using the best-suited user interface. This can be done by having the infrastructure server transfer an interface driver program to the wireless link (if it is not already there) or use an interface driver program that could be executed directly by the interface client if needed (Initially it is expected that the wireless link may execute the interface driver program, but as the system gets acceptance, the code may move to run on the interface client.)A protocol with reduced bandwidth requirements can be used to control the interface client. The infrastructure server or the wireless link may know where the user ended the last session, and can continue from there. Thus, interface roaming is achieved.

The infrastructure server can also target the user's preferences based on past user behavior (patterns) and predefined user preferences. This may enable the user

interface to appear smart, and this may enable smart applications. Since the terminal is likely to be in a fixed location, the infrastructure server may be informed about the interface client's location, and this can be included in the user interface setup as well. For example, the interface client can make suggestions to the user about sales, good restaurants etc. This may be an option that the user has the power to enable or disable.

Similar, as part of scanning for new devices, the system can also register the user in the surrounding infrastructure, and this may enable personalized greetings, dedicated services, and automatic-registration actions for example.

Display Roaming When an Interface Client is Already Connected to the Infrastructure Server

As previously mentioned, embodiments of the present invention may enable display roaming when an interface client already has a way to contact the infrastructure server without using (i.e., going through) the user's wireless link. In such an embodiment, the user may logon to the interface client to identify the user. Many different authentication schemes may be possible – one example could be a universal ID-card like a SIM card, and fingerprints identification (or identification by biometrics), or a User ID / password system. The wireless link may be used to perform the user identification or may include a SIM card therein for enabling the identification. However, in this embodiment, the wireless link does not have to serve as the communication link between the interface client and the infrastructure server. If the interface client does not offer a convenient input interface, the wireless link could also be used as the input device.

Figure 9 is a schematic diagram of some possible exemplary modes for interface roaming when the interface client **110** has its own connection to the server **104** separate from a connection provided through the wireless link **102** in accordance with an embodiment of the present invention. The illustrative modes illustrated in Figure 9 include a mode **902** where the connection between the interface client **110**

and the server is a wired connection **904** where identification of the user is provided via the wireless link **102**, a mode **906** where the connection between the interface client **110** and the server is a wired connection **904** and where identification of the user is not provided via the wireless link, and a mode **908** where the connection
5 between the interface client **110** and the server is a direct wireless connection **910** to the infrastructure or a connection through a scatter net.

As discussed above, logon to an interface client can be performed in many ways. However, there are two distinct options. Either the user physically performs a logon
10 procedure (initiated by the user), or the interface client detects the user e.g. by contacting the wireless link, and the user's ID back. While a central user database may exist, it may be more advantageous that the some kind of electronic identification (wireless link, Electronic ID-card etc.) be used since it can identify the user and the user's infrastructure server.

15 After the user login (verified by the infrastructure server) – the infrastructure server should already know the interface client's capabilities, so the infrastructure server can tell the interface client to generate interface the user had when last connected. The infrastructure server may reformat the user experiences to the capabilities of the
20 new interface client.

An issue in this embodiment is the ability to end a session. Since the user is not part of the link between the infrastructure server and the interface client, the connection can exist even after a user has left the interface client. Therefore, the system must
25 include a way to identify if the user is still using the interface client. A logoff button may be provided exist as part of the interface. An embodiment may rely on the electronic identification of the user and where the system may automatically logoff if the electronic identification is no longer presented to the interface (e.g., if the wireless link is no longer in range, or the electronic ID-card is removed, the session
30 may automatically terminate).

Hardware Implementation

Figure 10 illustrates an exemplary system 1000 with a plurality of components 1002 in accordance with one embodiment of the present invention. As shown, such components include a network 1004 which take any form including, but not limited to a local area network, a wide area network such as the Internet, and a wireless network 1005. Coupled to the network 1004 is a plurality of computers which may take the form of desktop computers 1006, lap-top computers 1008, hand-held computers 1010 (including wireless devices 1012 such as wireless PDA's or mobile phones), or any other type of computing hardware/software. As an option, the various computers may be connected to the network 1004 by way of a server 1014 which may be equipped with a firewall for security purposes. It should be noted that any other type of hardware or software may be included in the system and be considered a component thereof.

A representative hardware environment associated with the various components of Figure 10 is depicted in Figure 11. In the present description, the various sub-components of each of the components may also be considered components of the system. For example, particular software modules executed on any component of the system may also be considered components of the system. Figure 11 illustrates a typical hardware configuration of a workstation in accordance with one embodiment having a central processing unit 1110, such as a microprocessor, and a number of other units interconnected via a system bus 1112.

The workstation shown in Figure 11 includes a Random Access Memory (RAM) 1114, Read Only Memory (ROM) 1116, an I/O adapter 1118 for connecting peripheral devices such as disk storage units 1120 to the bus 1112, a user interface adapter 1122 for connecting a keyboard 1124, a mouse 1126, a speaker 1128, a microphone 1132, and/or other user interface devices such as a touch screen (not shown) to the bus 1112, communication adapter 1134 for connecting the workstation

to a communication network **1135** (e.g., a data processing network) and a display adapter **1136** for connecting the bus **1112** to a display device **1138**.

An embodiment of the present invention may be written using JAVA, C, and the C++ language and utilize object oriented programming methodology. Object oriented programming (OOP) has become increasingly used to develop complex applications. As OOP moves toward the mainstream of software design and development, various software solutions require adaptation to make use of the benefits of OOP. A need exists for these principles of OOP to be applied to a messaging interface of an electronic messaging system such that a set of OOP classes and objects for the messaging interface can be provided.

OOP is a process of developing computer software using objects, including the steps of analyzing the problem, designing the system, and constructing the program. An object is a software package that contains both data and a collection of related structures and procedures. Since it contains both data and a collection of structures and procedures, it can be visualized as a self-sufficient component that does not require other additional structures, procedures or data to perform its specific task. OOP, therefore, views a computer program as a collection of largely autonomous components, called objects, each of which is responsible for a specific task. This concept of packaging data, structures, and procedures together in one component or module is called encapsulation.

In general, OOP components are reusable software modules which present an interface that conforms to an object model and which are accessed at run-time through a component integration architecture. A component integration architecture is a set of architecture mechanisms which allow software modules in different process spaces to utilize each others capabilities or functions. This is generally done by assuming a common component object model on which to build the architecture. It is worthwhile to differentiate between an object and a class of objects at this point. An object is a single instance of the class of objects, which is often just called a

class. A class of objects can be viewed as a blueprint, from which many objects can be formed.

OOP allows the programmer to create an object that is a part of another object. For example, the object representing a piston engine is said to have a composition-relationship with the object representing a piston. In reality, a piston engine comprises a piston, valves and many other components; the fact that a piston is an element of a piston engine can be logically and semantically represented in OOP by two objects.

OOP also allows creation of an object that “depends from” another object. If there are two objects, one representing a piston engine and the other representing a piston engine wherein the piston is made of ceramic, then the relationship between the two objects is not that of composition. A ceramic piston engine does not make up a piston engine. Rather it is merely one kind of piston engine that has one more limitation than the piston engine; its piston is made of ceramic. In this case, the object representing the ceramic piston engine is called a derived object, and it inherits all of the aspects of the object representing the piston engine and adds further limitation or detail to it. The object representing the ceramic piston engine “depends from” the object representing the piston engine. The relationship between these objects is called inheritance.

When the object or class representing the ceramic piston engine inherits all of the aspects of the objects representing the piston engine, it inherits the thermal characteristics of a standard piston defined in the piston engine class. However, the ceramic piston engine object overrides these ceramic specific thermal characteristics, which are typically different from those associated with a metal piston. It skips over the original and uses new functions related to ceramic pistons. Different kinds of piston engines have different characteristics, but may have the same underlying functions associated with it (e.g., how many pistons in the engine, ignition sequences, lubrication, etc.). To access each of these functions in any piston engine

object, a programmer would call the same functions with the same names, but each type of piston engine may have different/overriding implementations of functions behind the same name. This ability to hide different implementations of a function behind the same name is called polymorphism and it greatly simplifies communication among objects.

With the concepts of composition-relationship, encapsulation, inheritance and polymorphism, an object can represent just about anything in the real world. In fact, one's logical perception of the reality is the only limit on determining the kinds of things that can become objects in object-oriented software. Some typical categories are as follows:

- Objects can represent physical objects, such as automobiles in a traffic-flow simulation, electrical components in a circuit-design program, countries in an economics model, or aircraft in an air-traffic-control system.
- Objects can represent elements of the computer-user environment such as windows, menus or graphics objects.
- An object can represent an inventory, such as a personnel file or a table of the latitudes and longitudes of cities.
- An object can represent user-defined data types such as time, angles, and complex numbers, or points on the plane.

With this enormous capability of an object to represent just about any logically separable matters, OOP allows the software developer to design and implement a computer program that is a model of some aspects of reality, whether that reality is a physical entity, a process, a system, or a composition of matter. Since the object can represent anything, the software developer can create an object which can be used as a component in a larger software project in the future.

If 90% of a new OOP software program consists of proven, existing components made from preexisting reusable objects, then only the remaining 10% of the new

software project has to be written and tested from scratch. Since 90% already came from an inventory of extensively tested reusable objects, the potential domain from which an error could originate is 10% of the program. As a result, OOP enables software developers to build objects out of other, previously built objects.

5

This process closely resembles complex machinery being built out of assemblies and sub-assemblies. OOP technology, therefore, makes software engineering more like hardware engineering in that software is built from existing components, which are available to the developer as objects. All this adds up to an improved quality of the software as well as an increased speed of its development.

10

Programming languages are beginning to fully support the OOP principles, such as encapsulation, inheritance, polymorphism, and composition-relationship. With the advent of the C++ language, many commercial software developers have embraced OOP. C++ is an OOP language that offers a fast, machine-executable code.

15

Furthermore, C++ is suitable for both commercial-application and systems-programming projects. For now, C++ appears to be the most popular choice among many OOP programmers, but there is a host of other OOP languages, such as Smalltalk, Common Lisp Object System (CLOS), and Eiffel. Additionally, OOP capabilities are being added to more traditional popular computer programming languages such as Pascal.

20

The benefits of object classes can be summarized, as follows:

- Objects and their corresponding classes break down complex programming problems into many smaller, simpler problems.
- Encapsulation enforces data abstraction through the organization of data into small, independent objects that can communicate with each other. Encapsulation protects the data in an object from accidental damage, but allows other objects to interact with that data by calling the object's member functions and structures.

25

30

- Subclassing and inheritance make it possible to extend and modify objects through deriving new kinds of objects from the standard classes available in the system. Thus, new capabilities are created without having to start from scratch.
- 5 • Polymorphism and multiple inheritance make it possible for different programmers to mix and match characteristics of many different classes and create specialized objects that can still work with related objects in predictable ways.
- Class hierarchies and containment hierarchies provide a flexible mechanism
10 for modeling real-world objects and the relationships among them.
- Libraries of reusable classes are useful in many situations, but they also have some limitations. For example:
- Complexity. In a complex system, the class hierarchies for related classes
15 can become extremely confusing, with many dozens or even hundreds of classes.
- Flow of control. A program written with the aid of class libraries is still responsible for the flow of control (i.e., it must control the interactions among all the objects created from a particular library). The programmer has to decide which functions to call at what times for which kinds of objects.
- 20 • Duplication of effort. Although class libraries allow programmers to use and reuse many small pieces of code, each programmer puts those pieces together in a different way. Two different programmers can use the same set of class libraries to write two programs that do exactly the same thing but whose internal structure (i.e., design) may be quite different, depending on hundreds
25 of small decisions each programmer makes along the way. Inevitably, similar pieces of code end up doing similar things in slightly different ways and do not work as well together as they should.

Class libraries are very flexible. As programs grow more complex, more

30 programmers are forced to reinvent basic solutions to basic problems over and over

again. A relatively new extension of the class library concept is to have a framework of class libraries. This framework is more complex and consists of significant collections of collaborating classes that capture both the small scale patterns and major mechanisms that implement the common requirements and design in a specific application domain. They were first developed to free application programmers from the chores involved in displaying menus, windows, dialog boxes, and other standard user interface elements for personal computers.

Frameworks also represent a change in the way programmers think about the interaction between the code they write and code written by others. In the early days of procedural programming, the programmer called libraries provided by the operating system to perform certain tasks, but basically the program executed down the page from start to finish, and the programmer was solely responsible for the flow of control. This was appropriate for printing out paychecks, calculating a mathematical table, or solving other problems with a program that executed in just one way.

The development of graphical user interfaces began to turn this procedural programming arrangement inside out. These interfaces allow the user, rather than program logic, to drive the program and decide when certain actions should be performed. Today, most personal computer software accomplishes this by means of an event loop which monitors the mouse, keyboard, and other sources of external events and calls the appropriate parts of the programmer's code according to actions that the user performs. The programmer no longer determines the order in which events occur. Instead, a program is divided into separate pieces that are called at unpredictable times and in an unpredictable order. By relinquishing control in this way to users, the developer creates a program that is much easier to use.

Nevertheless, individual pieces of the program written by the developer still call libraries provided by the operating system to accomplish certain tasks, and the programmer must still determine the flow of control within each piece after it's called by the event loop. Application code still "sits on top of" the system.

Even event loop programs require programmers to write a lot of code that should not need to be written separately for every application. The concept of an application framework carries the event loop concept further. Instead of dealing with all the nuts and bolts of constructing basic menus, windows, and dialog boxes and then making these things all work together, programmers using application frameworks start with working application code and basic user interface elements in place. Subsequently, they build from there by replacing some of the generic capabilities of the framework with the specific capabilities of the intended application.

Application frameworks reduce the total amount of code that a programmer has to write from scratch. However, because the framework is really a generic application that displays windows, supports copy and paste, and so on, the programmer can also relinquish control to a greater degree than event loop programs permit. The framework code takes care of almost all event handling and flow of control, and the programmer's code is called only when the framework needs it (e.g., to create or manipulate a proprietary data structure).

A programmer writing a framework program not only relinquishes control to the user (as is also true for event loop programs), but also relinquishes the detailed flow of control within the program to the framework. This approach allows the creation of more complex systems that work together in interesting ways, as opposed to isolated programs, having custom code, being created over and over again for similar problems.

Thus, as is explained above, a framework basically is a collection of cooperating classes that make up a reusable design solution for a given problem domain. It typically includes objects that provide default behavior (e.g., for menus and windows), and programmers use it by inheriting some of that default behavior and overriding other behavior so that the framework calls application code at the appropriate times.

There are three main differences between frameworks and class libraries:

- Behavior versus protocol. Class libraries are essentially collections of behaviors that you can call when you want those individual behaviors in your program. A framework, on the other hand, provides not only behavior but also the protocol or set of rules that govern the ways in which behaviors can be combined, including rules for what a programmer is supposed to provide versus what the framework provides.
- Call versus override. With a class library, the code the programmer instantiates objects and calls their member functions. It's possible to instantiate and call objects in the same way with a framework (i.e., to treat the framework as a class library), but to take full advantage of a framework's reusable design, a programmer typically writes code that overrides and is called by the framework. The framework manages the flow of control among its objects. Writing a program involves dividing responsibilities among the various pieces of software that are called by the framework rather than specifying how the different pieces should work together.
- Implementation versus design. With class libraries, programmers reuse only implementations, whereas with frameworks, they reuse design. A framework embodies the way a family of related programs or pieces of software work. It represents a generic design solution that can be adapted to a variety of specific problems in a given domain. For example, a single framework can embody the way a user interface works, even though two different user interfaces created with the same framework might solve quite different interface problems.

Thus, through the development of frameworks for solutions to various problems and programming tasks, significant reductions in the design and development effort for software can be achieved. A preferred embodiment of the invention utilizes HyperText Markup Language (HTML) to implement documents on the Internet together with a general-purpose secure communication protocol for a transport

medium between the client and the Newco. HTTP or other protocols could be readily substituted for HTML without undue experimentation. Information on these products is available in T. Berners-Lee, D. Connolly, "RFC 1866: Hypertext Markup Language - 2.0" (Nov. 1995); and R. Fielding, H. Frystyk, T. Berners-Lee, J. Gettys and J.C. Mogul, "Hypertext Transfer Protocol -- HTTP/1.1: HTTP Working Group Internet Draft" (May 2, 1996). HTML is a simple data format used to create hypertext documents that are portable from one platform to another. HTML documents are SGML documents with generic semantics that are appropriate for representing information from a wide range of domains. HTML has been in use by the World-Wide Web global information initiative since 1990. HTML is an application of ISO Standard 8879; 1986 Information Processing Text and Office Systems; Standard Generalized Markup Language (SGML).

To date, Web development tools have been limited in their ability to create dynamic Web applications which span from client to server and interoperate with existing computing resources. Until recently, HTML has been the dominant technology used in development of Web-based solutions. However, HTML has proven to be inadequate in the following areas:

- Poor performance;
- Restricted user interface capabilities;
- Can only produce static Web pages;
- Lack of interoperability with existing applications and data; and
- Inability to scale.

Sun Microsystems's Java language solves many of the client-side problems by:

- Improving performance on the client side;
- Enabling the creation of dynamic, real-time Web applications; and
- Providing the ability to create a wide variety of user interface components.

With Java, developers can create robust User Interface (UI) components. Custom "widgets" (e.g., real-time stock tickers, animated icons, etc.) can be created, and client-side performance is improved. Unlike HTML, Java supports the notion of client-side validation, offloading appropriate processing onto the client for improved performance. Dynamic, real-time Web pages can be created. Using the above-mentioned custom UI components, dynamic Web pages can also be created.

Sun's Java language has emerged as an industry-recognized language for "programming the Internet." Sun defines Java as: "a simple, object-oriented, distributed, interpreted, robust, secure, architecture-neutral, portable, high-performance, multithreaded, dynamic, buzzword-compliant, general-purpose programming language. Java supports programming for the Internet in the form of platform-independent Java applets." Java applets are small, specialized applications that comply with Sun's Java Application Programming Interface (API) allowing developers to add "interactive content" to Web documents (e.g., simple animations, page adornments, basic games, etc.). Applets execute within a Java-compatible browser (e.g., Netscape Navigator) by copying code from the server to client. From a language standpoint, Java's core feature set is based on C++. Sun's Java literature states that Java is basically, "C++ with extensions from Objective C for more dynamic method resolution."

Another technology that provides similar function to JAVA is provided by Microsoft and ActiveX Technologies, to give developers and Web designers wherewithal to build dynamic content for the Internet and personal computers. ActiveX includes tools for developing animation, 3-D virtual reality, video and other multimedia content. The tools use Internet standards, work on multiple platforms, and are being supported by over 100 companies. The group's building blocks are called ActiveX Controls, small, fast components that enable developers to embed parts of software in hypertext markup language (HTML) pages. ActiveX Controls work with a variety of programming languages including Microsoft Visual C++, Borland Delphi, Microsoft Visual Basic programming system and, in the future, Microsoft's

development tool for Java, code named "Jakarta." ActiveX Technologies also includes ActiveX Server Framework, allowing developers to create server applications. One of ordinary skill in the art readily recognizes that ActiveX could be substituted for JAVA without undue experimentation to practice the invention.

5

Transmission Control Protocol/Internet Protocol (TCP/IP) is a basic communication language or protocol of the Internet. It can also be used as a communications protocol in the private networks called intranet and in extranet. When you are set up with direct access to the Internet, your computer is provided with a copy of the TCP/IP program just as every other computer that you may send messages to or get information from also has a copy of TCP/IP.

10

TCP/IP is a two-layering program. The higher layer, Transmission Control Protocol (TCP), manages the assembling of a message or file into smaller packet that are transmitted over the Internet and received by a TCP layer that reassembles the packets into the original message. The lower layer, Internet Protocol (IP), handles the address part of each packet so that it gets to the right destination. Each gateway computer on the network checks this address to see where to forward the message. Even though some packets from the same message are routed differently than others, they'll be reassembled at the destination.

15

20

TCP/IP uses a client/server model of communication in which a computer user (a client) requests and is provided a service (such as sending a Web page) by another computer (a server) in the network. TCP/IP communication is primarily point-to-point, meaning each communication is from one point (or host computer) in the network to another point or host computer. TCP/IP and the higher-level applications that use it are collectively said to be "stateless" because each client request is considered a new request unrelated to any previous one (unlike ordinary phone conversations that require a dedicated connection for the call duration). Being stateless frees network paths so that everyone can use them continuously. (Note that

25

30

the TCP layer itself is not stateless as far as any one message is concerned. Its connection remains in place until all packets in a message have been received.).

Many Internet users are familiar with the even higher layer application protocols that use TCP/IP to get to the Internet. These include the World Wide Web's Hypertext Transfer Protocol (HTTP), the File Transfer Protocol (FTP), Telnet which lets you logon to remote computers, and the Simple Mail Transfer Protocol (SMTP). These and other protocols are often packaged together with TCP/IP as a "suite."

Personal computer users usually get to the Internet through the Serial Line Internet Protocol (SLIP) or the Point-to-Point Protocol. These protocols encapsulate the IP packets so that they can be sent over a dial-up phone connection to an access provider's modem.

Protocols related to TCP/IP include the User Datagram Protocol (UDP), which is used instead of TCP for special purposes. Other protocols are used by network host computers for exchanging router information. These include the Internet Control Message Protocol (ICMP), the Interior Gateway Protocol (IGP), the Exterior Gateway Protocol (EGP), and the Border Gateway Protocol (BGP).

Internetwork Packet Exchange (IPX) is a networking protocol from Novell that interconnects networks that use Novell's NetWare clients and servers. IPX is a datagram or packet protocol. IPX works at the network layer of communication protocols and is connectionless (that is, it doesn't require that a connection be maintained during an exchange of packets as, for example, a regular voice phone call does).

Packet acknowledgment is managed by another Novell protocol, the Sequenced Packet Exchange (SPX). Other related Novell NetWare protocols are: the Routing Information Protocol (RIP), the Service Advertising Protocol (SAP), and the NetWare Link Services Protocol (NLSP).

A virtual private network (VPN) is a private data network that makes use of the public telecommunication infrastructure, maintaining privacy through the use of a tunneling protocol and security procedures. A virtual private network can be contrasted with a system of owned or leased lines that can only be used by one company. The idea of the VPN is to give the company the same capabilities at much lower cost by using the shared public infrastructure rather than a private one. Phone companies have provided secure shared resources for voice messages. A virtual private network makes it possible to have the same secure sharing of public resources for data.

Using a virtual private network involves encryption data before sending it through the public network and decrypting it at the receiving end. An additional level of security involves encrypting not only the data but also the originating and receiving network addresses. Microsoft, 3Com, and several other companies have developed the Point-to-Point Tunneling Protocol (PPP) and Microsoft has extended Windows NT to support it. VPN software is typically installed as part of a company's firewall server.

Wireless refers to a communications, monitoring, or control system in which electromagnetic radiation spectrum or acoustic waves carry a signal through atmospheric space rather than along a wire. In most wireless systems, radio frequency (RF) or infrared transmission (IR) waves are used. Some monitoring devices, such as intrusion alarms, employ acoustic waves at frequencies above the range of human hearing.

Early experimenters in electromagnetic physics dreamed of building a so-called wireless telegraph. The first wireless telegraph transmitters went on the air in the early years of the 20th century. Later, as amplitude modulation (AM) made it possible to transmit voices and music via wireless, the medium came to be called *radio*. With the advent of television, fax, data communication, and the effective use

of a larger portion of the electromagnetic spectrum, the original term has been brought to life again.

Common examples of wireless equipment in use today include the Global

5 Positioning System, cellular telephone phones and pagers, cordless computer accessories (for example, the cordless mouse), home-entertainment-system control boxes, remote garage-door openers, two-way radios, and baby monitors. An increasing number of companies and organizations are using wireless LAN. Wireless transceivers are available for connection to portable and notebook
10 computers, allowing Internet access in selected cities without the need to locate a telephone jack. Eventually, it will be possible to link any computer to the Internet via satellite, no matter where in the world the computer might be located.

Bluetooth is a computing and telecommunications industry specification that

15 describes how mobile phones, computers, and personal digital assistants (PDA's) can easily interconnect with each other and with home and business phones and computers using a short-range wireless connection. Each device is equipped with a microchip transceiver that transmits and receives in a previously unused frequency band of 2.45 GHz that is available globally (with some variation of bandwidth in
20 different countries). In addition to data, up to three voice channels are available. Each device has a unique 48-bit address from the IEEE 802 standard. Connections can be point-to-point or multipoint. The maximum range is 10 meters. Data can be presently be exchanged at a rate of 1 megabit per second (up to 2 Mbps in the second generation of the technology). A frequency hop scheme allows devices to
25 communicate even in areas with a great deal of electromagnetic interference. Built-in encryption and verification is provided.

Encryption is the conversion of data into a form, called a ciphertext, that cannot be easily understood by unauthorized people. Decryption is the process of converting
30 encrypted data back into its original form, so it can be understood.

The use of encryption/decryption is as old as the art of communication. In wartime, a cipher, often incorrectly called a "code," can be employed to keep the enemy from obtaining the contents of transmissions (technically, a code is a means of representing a signal without the intent of keeping it secret; examples are Morse code and ASCII.). Simple ciphers include the substitution of letters for numbers, the rotation of letters in the alphabet, and the "scrambling" of voice signals by inverting the sideband frequencies. More complex ciphers work according to sophisticated computer algorithm that rearrange the data bits in digital signals.

In order to easily recover the contents of an encrypted signal, the correct decryption key is required. The key is an algorithm that "undoes" the work of the encryption algorithm. Alternatively, a computer can be used in an attempt to "break" the cipher. The more complex the encryption algorithm, the more difficult it becomes to eavesdrop on the communications without access to the key.

Rivest-Shamir-Adleman (RSA) is an Internet encryption and authentication system that uses an algorithm developed in 1977 by Ron Rivest, Adi Shamir, and Leonard Adleman. The RSA algorithm is a commonly used encryption and authentication algorithm and is included as part of the Web browser from Netscape and Microsoft. It's also part of Lotus Notes, Intuit's Quicken, and many other products. The encryption system is owned by RSA Security.

The RSA algorithm involves multiplying two large prime numbers (a prime number is a number divisible only by that number and 1) and through additional operations deriving a set of two numbers that constitutes the public key and another set that is the private key. Once the keys have been developed, the original prime numbers are no longer important and can be discarded. Both the public and the private keys are needed for encryption /decryption but only the owner of a private key ever needs to know it. Using the RSA system, the private key never needs to be sent across the Internet.

The private key is used to decrypt text that has been encrypted with the public key. Thus, if I send you a message, I can find out your public key (but not your private key) from a central administrator and encrypt a message to you using your public key. When you receive it, you decrypt it with your private key. In addition to

5 encrypting messages (which ensures privacy), you can authenticate yourself to me (so I know that it is really you who sent the message) by using your private key to encrypt a digital certificate. When I receive it, I can use your public key to decrypt it.

10 While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of a preferred embodiment should not be limited by any of the above described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 26

CLAIMS

What is claimed is:

- 1 1. A method for facilitating user interface roaming, comprising:
 - 2 (a) receiving from the wireless link a list of usable interface clients in proximity
 - 3 to the wireless link, wherein each usable interface client has capabilities
 - 4 associated therewith;
 - 5 (b) selecting one of the interface clients from the list;
 - 6 (c) notifying the wireless link of the selected interface client;
 - 7 (d) initiating a connection with the selected interface client;
 - 8 (e) executing an application based on the capabilities of the selected interface
 - 9 client, wherein execution of the application generates content; and
 - 10 (f) transmitting the generated content to the interface client.
- 1 2. The method of claim 1, further comprising receiving a notification from the
- 2 wireless link that it has been activated, wherein the wireless link
- 3 determines usable interface clients in proximity thereto upon activation
- 4 thereof.
- 1 3. The method of claim 1, wherein the connection with the selected interface
- 2 client is initiated via the wireless link.
- 1 4. The method of claim 1, wherein the generated content is transmitted to the
- 2 interface client via the wireless link.
- 1 5. The method of claim 1, wherein each interface client includes a display.
- 1 6. The method of claim 1, further comprising receiving information from the
- 2 user based on the generated content, generating subsequent content based on

3 the received information, and transmitting the subsequently generated
4 content to the interface client.

1 7. The method of claim 1, further comprising: receiving a notification that
2 another interface client is proximate to the wireless link, querying a user
3 whether the user would like to switch to the other interface client, and
4 transmitting generated content to the other interface client upon receipt of a
5 response from the user indicating that the user wants to switch to the other
6 interface client.

1 8. The method of claim 1, wherein the wireless link receives the content if the
2 list of usable interface clients includes zero usable interface clients in
3 proximity to the wireless link.

1 9. The method of claim 1, further comprising: receiving information from the
2 wireless link input by a user.

1 10. The method of claim 1, wherein the wireless link and the interface client are
2 capable of communicating utilizing TCP/IP or IPX protocols.

1 11. The method of claim 1, wherein the wireless link has telephony capabilities.

1 12. The method of claim 1, wherein executing an application based on
2 capabilities of the selected interface client further comprises uploading from
3 a data store information relating to configuring the application based on the
4 capabilities of the selected interface client.

1 13. A computer program product for facilitating user interface roaming,
2 comprising:

- 3 (a) computer code for receiving from the wireless link a list of usable interface
4 clients in proximity to the wireless link, wherein each usable interface client
5 has capabilities associated therewith;
- 6 (b) computer code for selecting one of the interface clients from the list;
- 7 (c) computer code for notifying the wireless link of the selected interface client;
- 8 (d) computer code for initiating a connection with the selected interface client;
- 9 (e) computer code for executing an application based on the capabilities of the
10 selected interface client, wherein execution of the application generates
11 content; and
- 12 (f) computer code for transmitting the generated content to the interface client.
- 1 14. The computer program product of claim 13, further comprising computer
2 code for receiving a notification from the wireless link that it has been is
3 activated, wherein the wireless link determines usable interface clients in
4 proximity thereto upon activation thereof.
- 1 15. The computer program product of claim 13, wherein the connection with the
2 selected interface client is initiated via the wireless link.
- 1 16. The computer program product of claim 13, wherein the generated content is
2 transmitted to the interface client via the wireless link.
- 1 17. The computer program product of claim 13, wherein each interface client
2 includes a display.
- 1 18. The computer program product of claim 13, further comprising computer
2 code for receiving information from the user based on the generated content,
3 computer code for generating subsequent content based on the received
4 information, and computer code for transmitting the subsequently generated
5 content to the interface client.

1 19. The computer program product of claim 13, further comprising: computer
2 code for receiving a notification that another interface client is proximate to
3 the wireless link, computer code for querying a user whether the user would
4 like to switch to the other interface client, and computer code for transmitting
5 generated content to the other interface client upon receipt of a response from
6 the user indicating that the user wants to switch to the other interface client.

1 20. The computer program product of claim 13, wherein the wireless link
2 receives the content if the list of usable interface clients includes zero usable
3 interface clients in proximity to the wireless link.

1 21. The computer program product of claim 13, further comprising: computer
2 code for receiving information from the wireless link input by a user.

1 22. The computer program product of claim 13, wherein the wireless link and the
2 interface client are capable of communicating utilizing TCP/IP or IPX
3 protocols.

1 23. The computer program product of claim 13, wherein the wireless link has
2 telephony capabilities.

1 24. The computer program product of claim 13, wherein the computer code for
2 executing an application based on capabilities of the selected interface client
3 further comprises computer code for uploading from a data store information
4 relating to configuring the application based on the capabilities of the
5 selected interface client.

1 25. A system for facilitating user interface roaming, comprising:
2 (a) logic for receiving from the wireless link a list of usable interface clients in
3 proximity to the wireless link, wherein each usable interface client has
4 capabilities associated therewith;

- 5 (b) logic for selecting one of the interface clients from the list;
- 6 (c) logic for notifying the wireless link of the selected interface client;
- 7 (d) logic for initiating a connection with the selected interface client;
- 8 (e) logic for executing an application based on the capabilities of the selected
- 9 interface client, wherein execution of the application generates content; and
- 10 (f) logic for transmitting the generated content to the interface client.

1 26. The system of claim 25, further comprising logic for receiving a notification
2 from the wireless link that it has been activated, wherein the wireless link
3 determines usable interface clients in proximity thereto upon activation
4 thereof.

1 27. The system of claim 25, wherein the connection with the selected interface
2 client is initiated via the wireless link.

1 28. The system of claim 25, wherein the generated content is transmitted to the
2 interface client via the wireless link.

1 29. The system of claim 25, wherein each interface client includes a display.

1 30. The system of claim 25, further comprising logic for receiving information
2 from the user based on the generated content, logic for generating subsequent
3 content based on the received information, and logic for transmitting the
4 subsequently generated content to the interface client.

1 31. The system of claim 25, further comprising: logic for receiving a notification
2 that another interface client is proximate to the wireless link, logic for
3 querying a user whether the user would like to switch to the other interface
4 client, and logic for transmitting generated content to the other interface
5 client upon receipt of a response from the user indicating that the user wants
6 to switch to the other interface client.

1 32. The system of claim 25, wherein the wireless link receives the content if the
2 list of usable interface clients includes zero usable interface clients in
3 proximity to the wireless link.

1 33. The system of claim 25, further comprising: logic for receiving information
2 from the wireless link input by a user.

1 34. The system of claim 25, wherein the wireless link and the interface client are
2 capable of communicating utilizing TCP/IP or IPX protocols.

1 35. The system of claim 25, wherein the wireless link has telephony capabilities.

1 36. The system of claim 25, wherein the logic for executing an application based
2 on capabilities of the selected interface client further comprises logic for
3 uploading from a data store information relating to configuring the
4 application based on the capabilities of the selected interface client.

11/11/2011 11:11:11 AM

SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR FACILITATING USER INTERFACE ROAMING IN AN INTERFACE ROAMING NETWORK FRAMEWORK

ABSTRACT

A system, method and article of manufacture are provided for facilitating user interface roaming in an interface roaming network framework. Received from a wireless link is a list of usable interface clients in proximity to the wireless link. Each usable interface client has functional capabilities associated with it. One of the interface clients is selected from the list and the wireless link is notified of the selected interface client. A connection is then initiated with the selected interface client and an application is executed based on the capabilities of the selected interface client in order to generate content. The generated content is then transmitted to the interface client so that the content may be displayed using the interface client.

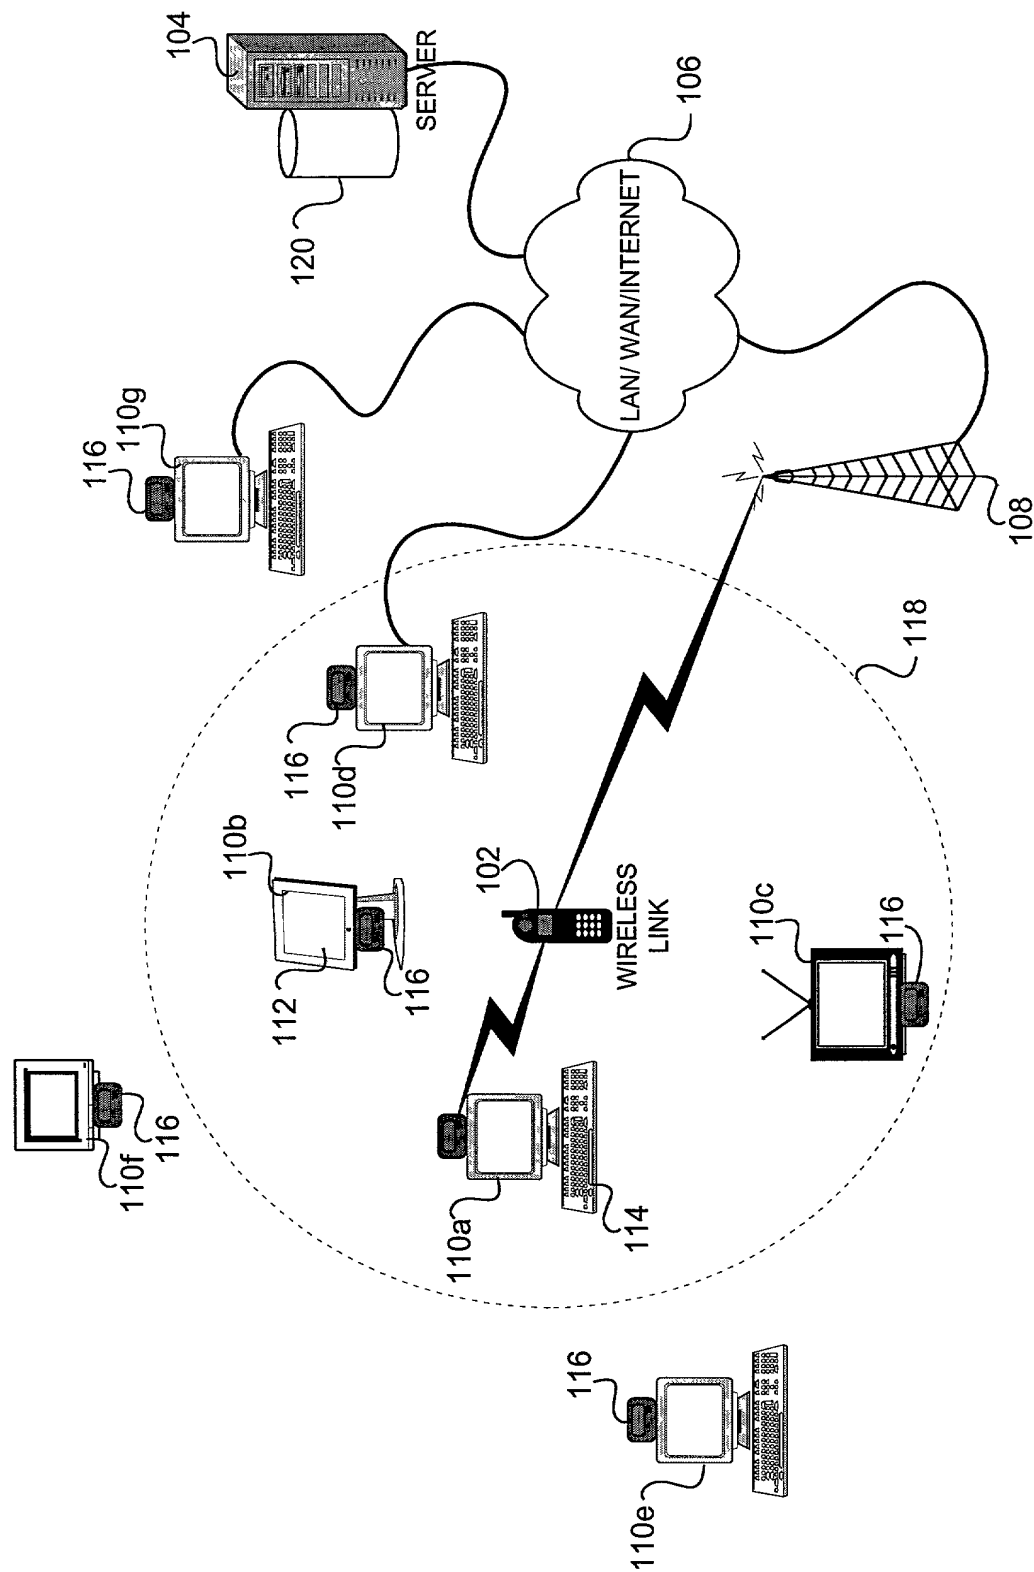


FIG. 1

FIG. 2 is a flowchart illustrating a process for selecting and connecting to an interface client based on capabilities.

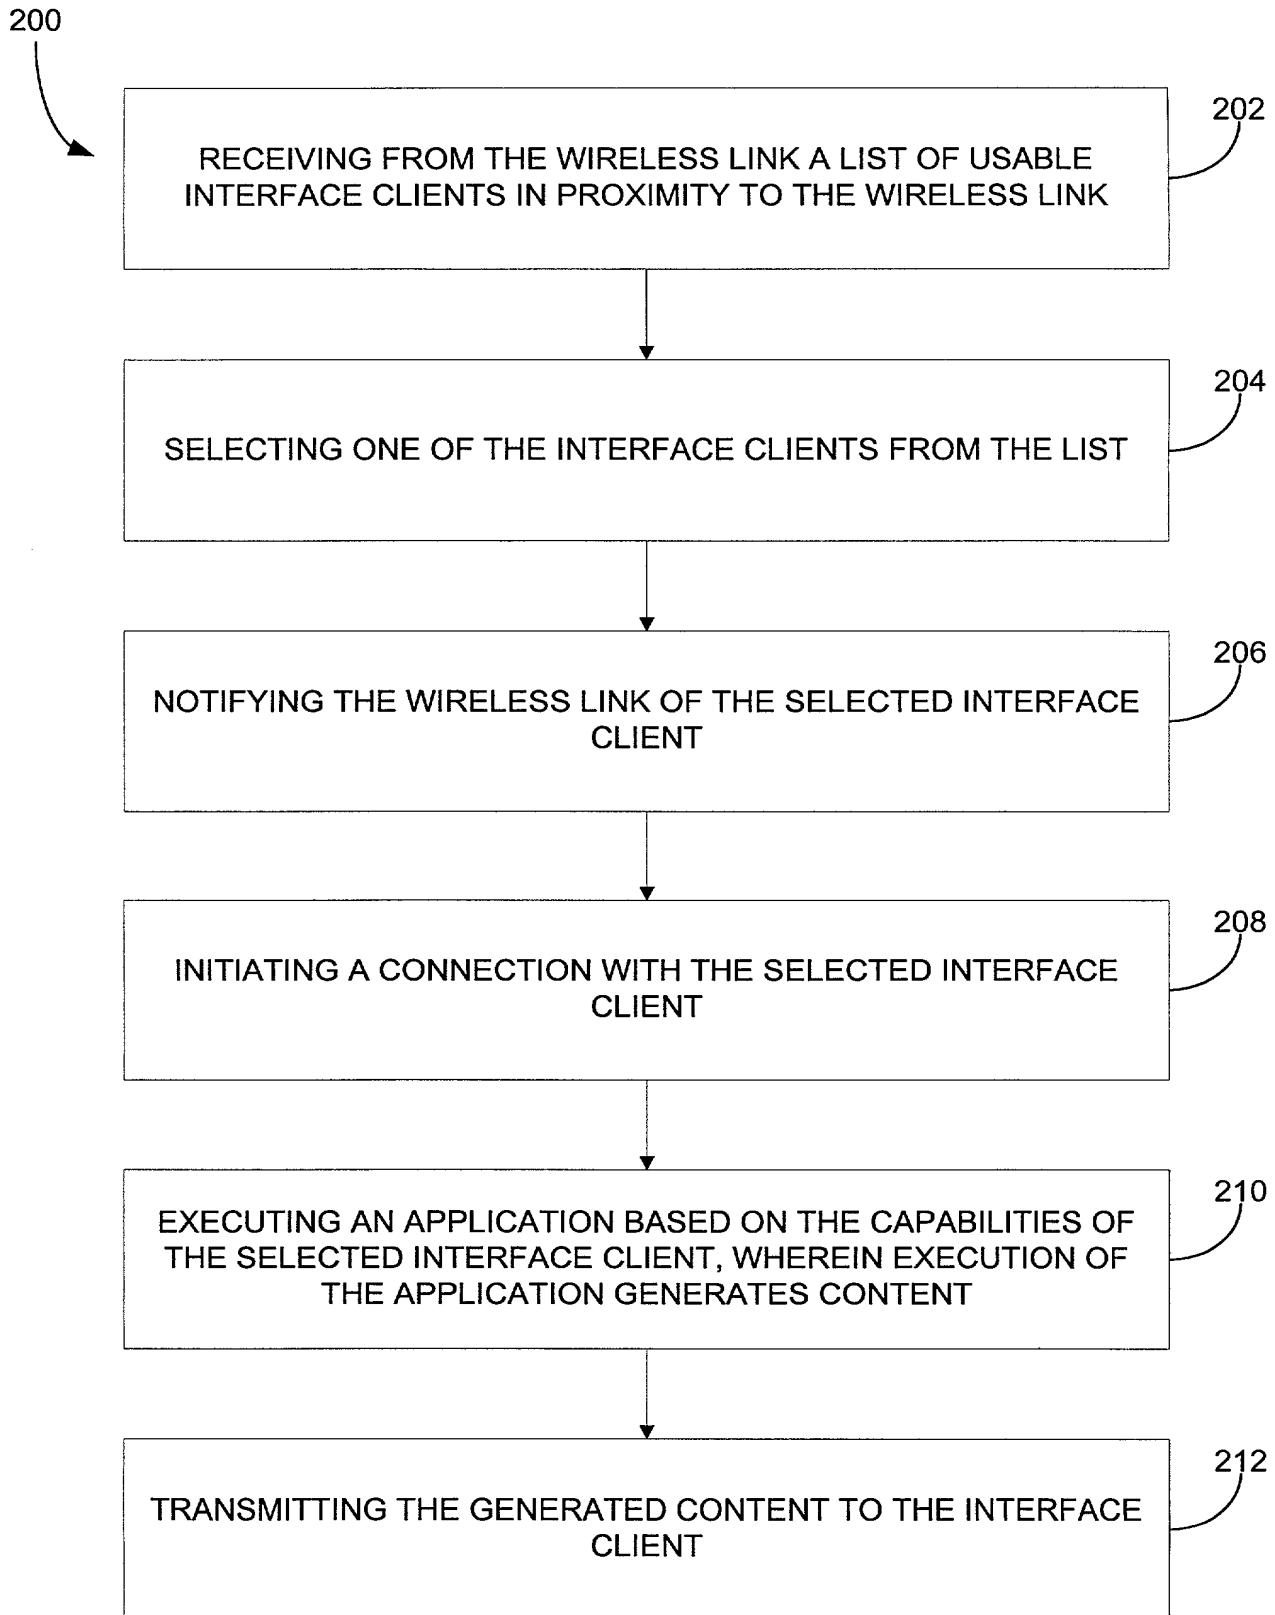


FIG. 2

FIG. 3 is a flowchart illustrating a method for connecting an infrastructure server and a selected interface client for communication therebetween. The method includes scanning a vicinity utilizing a wireless link to detect one or more interface clients in the vicinity of the wireless link, transmitting from the wireless link to an infrastructure server information relating to the interface clients detected in the vicinity, wherein the infrastructure server selects one of the interface clients based on the transmitted information, receiving a notification from the infrastructure server of the selected interface client utilizing the wireless link, and connecting the infrastructure server and the selected interface client for communication therebetween.

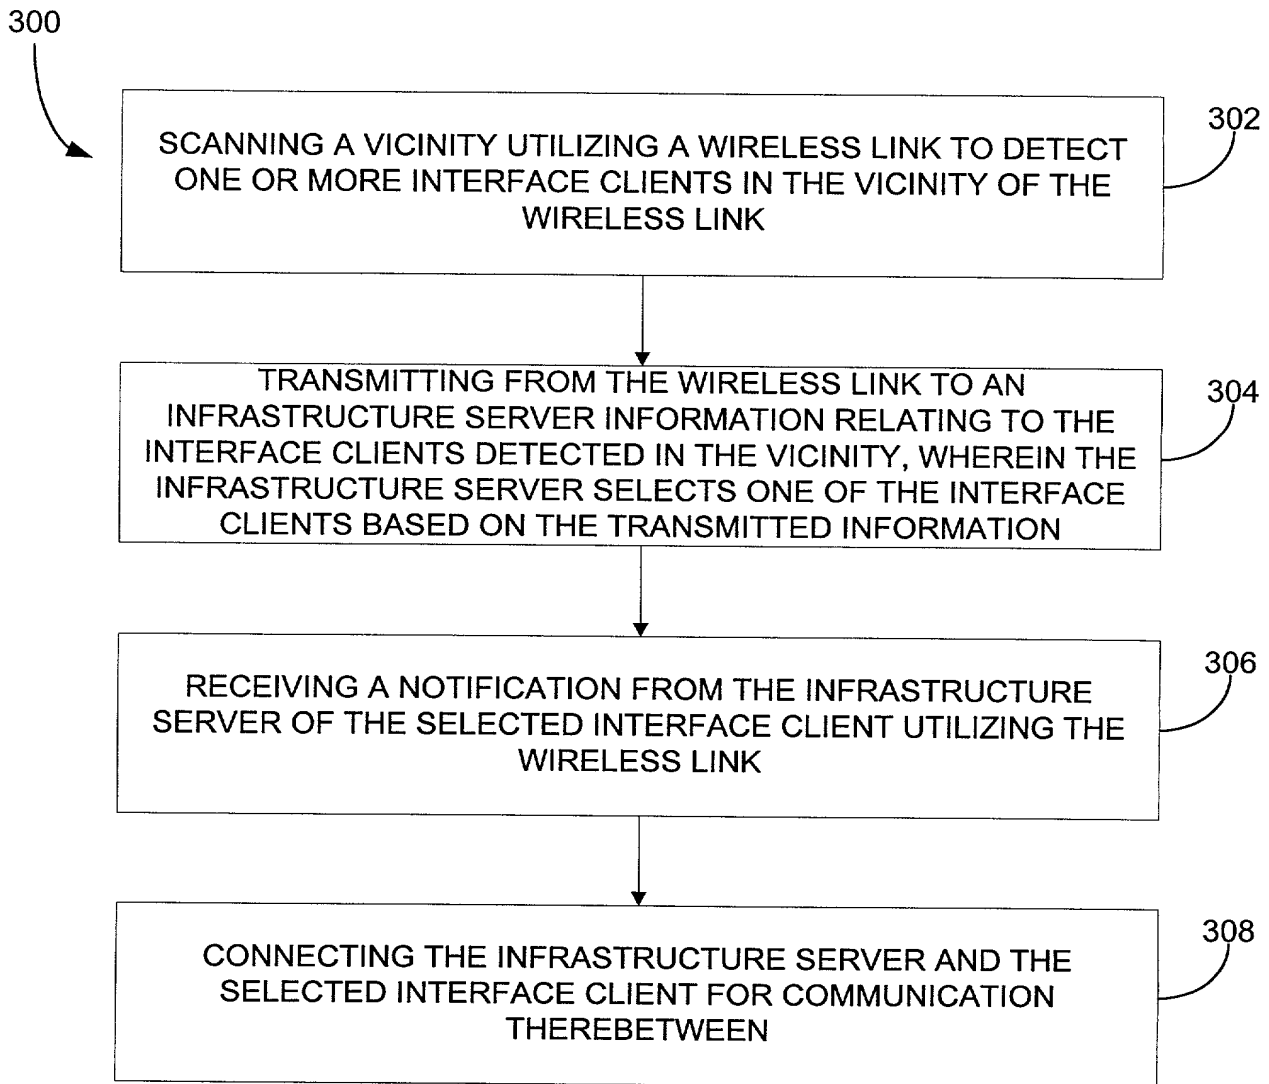


FIG. 3

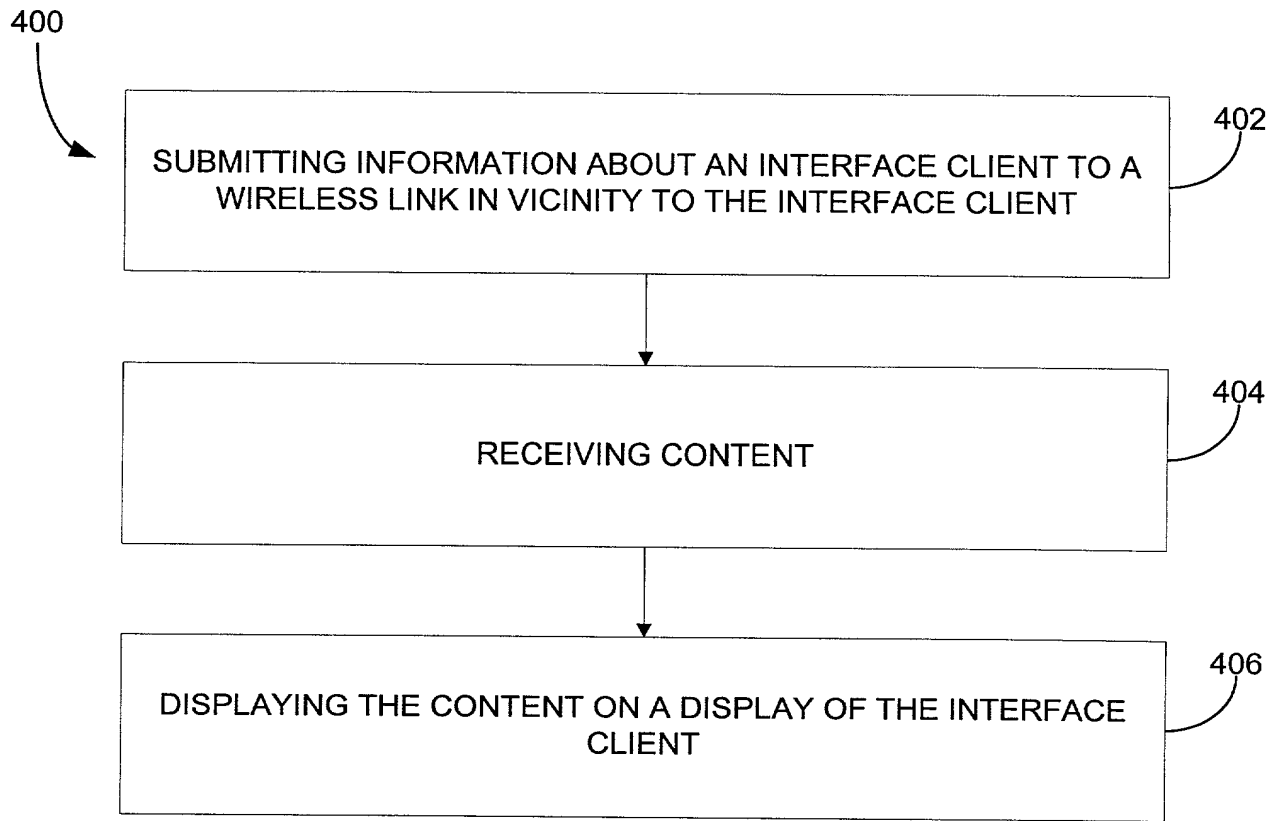


FIG. 4

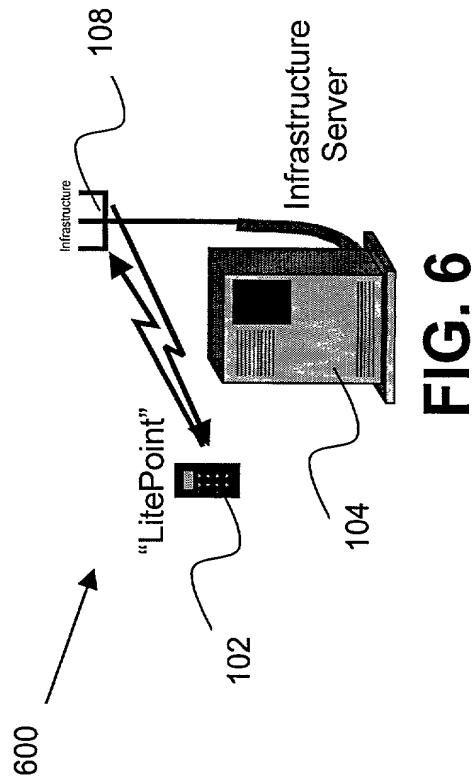
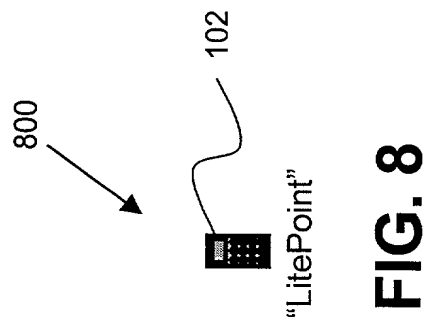
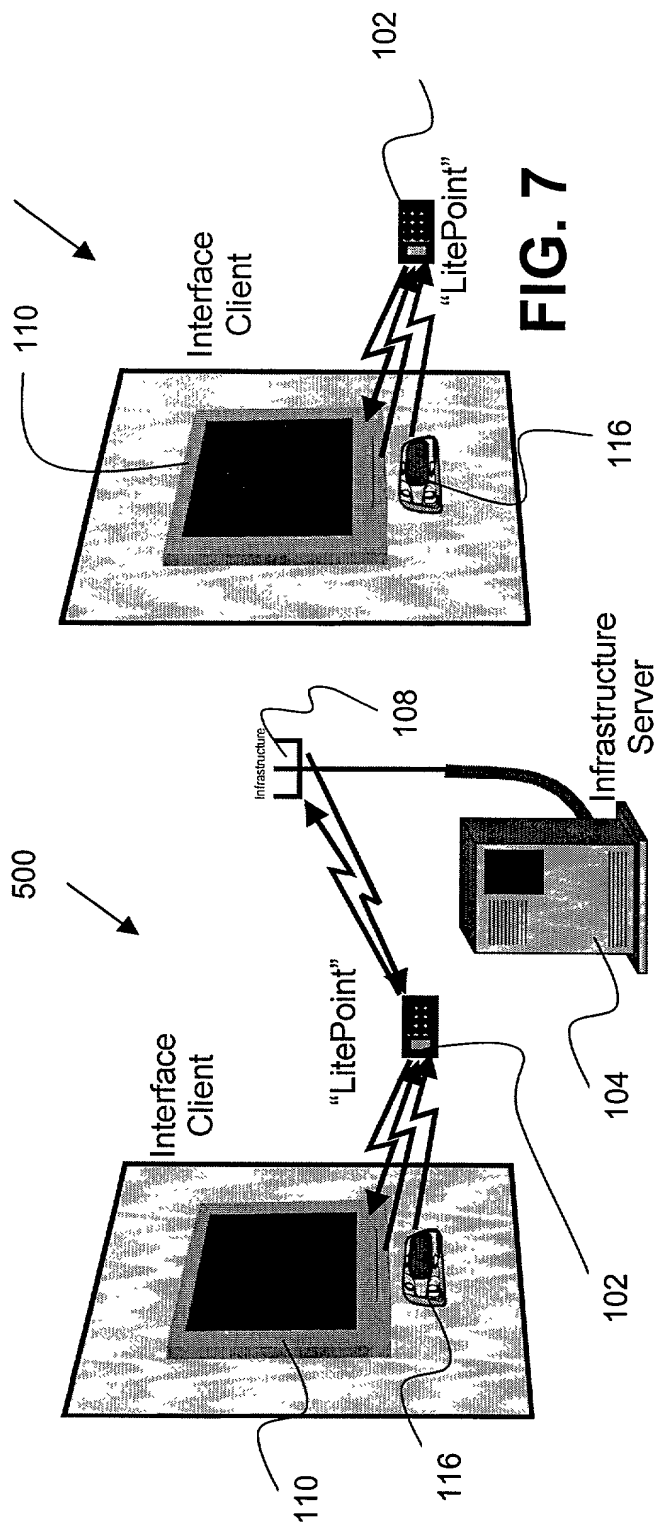


FIG. 9 is a block diagram of a system 900 for providing a login screen to a user. The system 900 includes a server 102, a network 904, and a plurality of client devices 902, 906, 908. Each client device 902, 906, 908 includes a display 110 and a login screen 116. The server 102 is connected to the network 904, which is connected to each client device 902, 906, 908. The server 102 provides the login screen 116 to each client device 902, 906, 908. The login screen 116 includes a login button 110. The user can press the login button 110 to log in to the system 900.

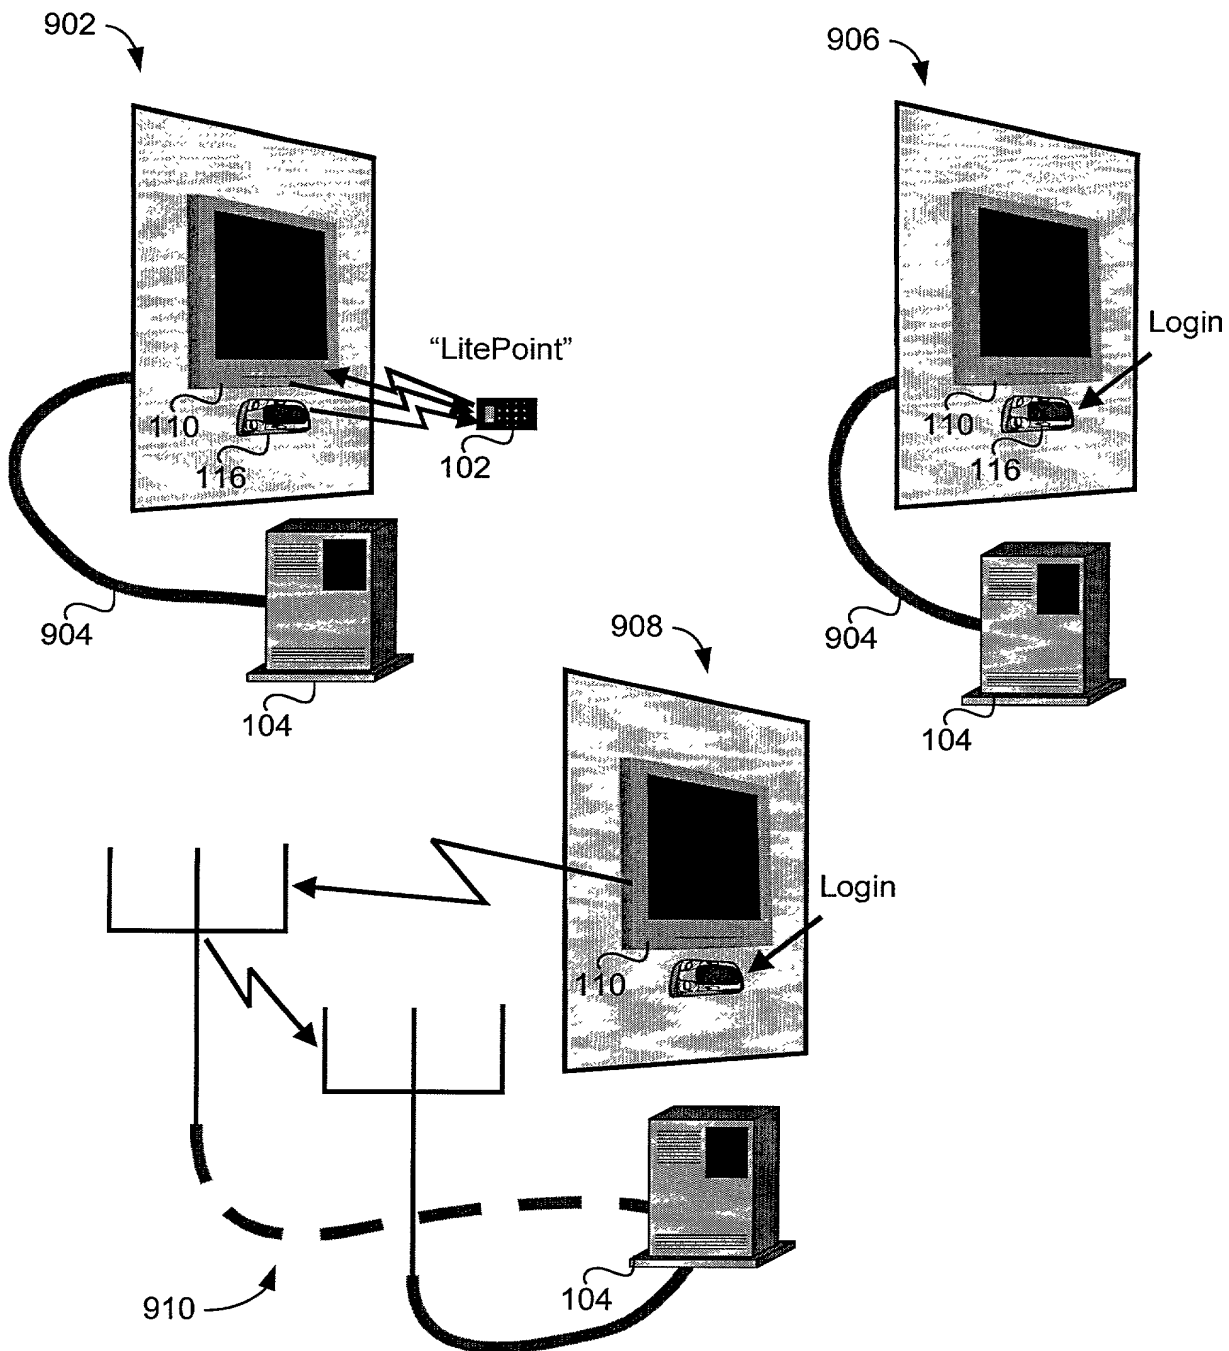


FIG. 9

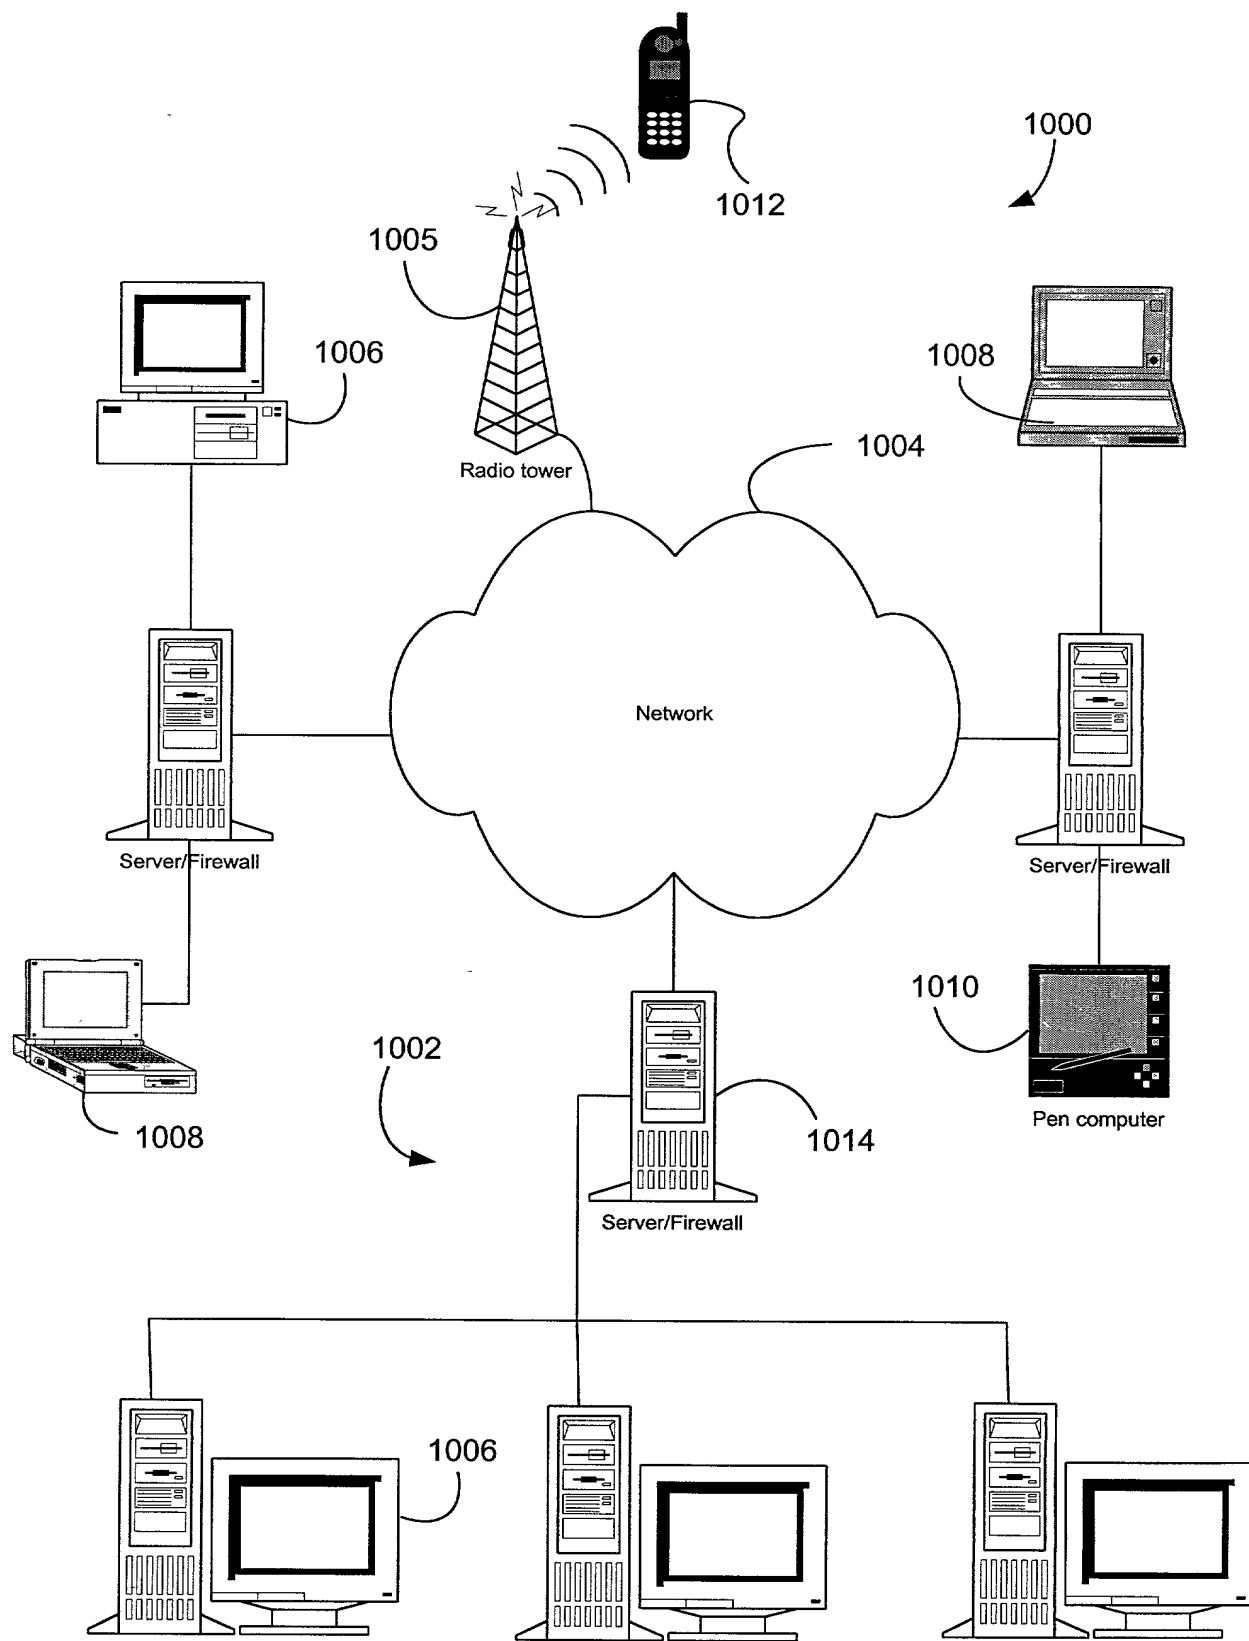


FIG. 10

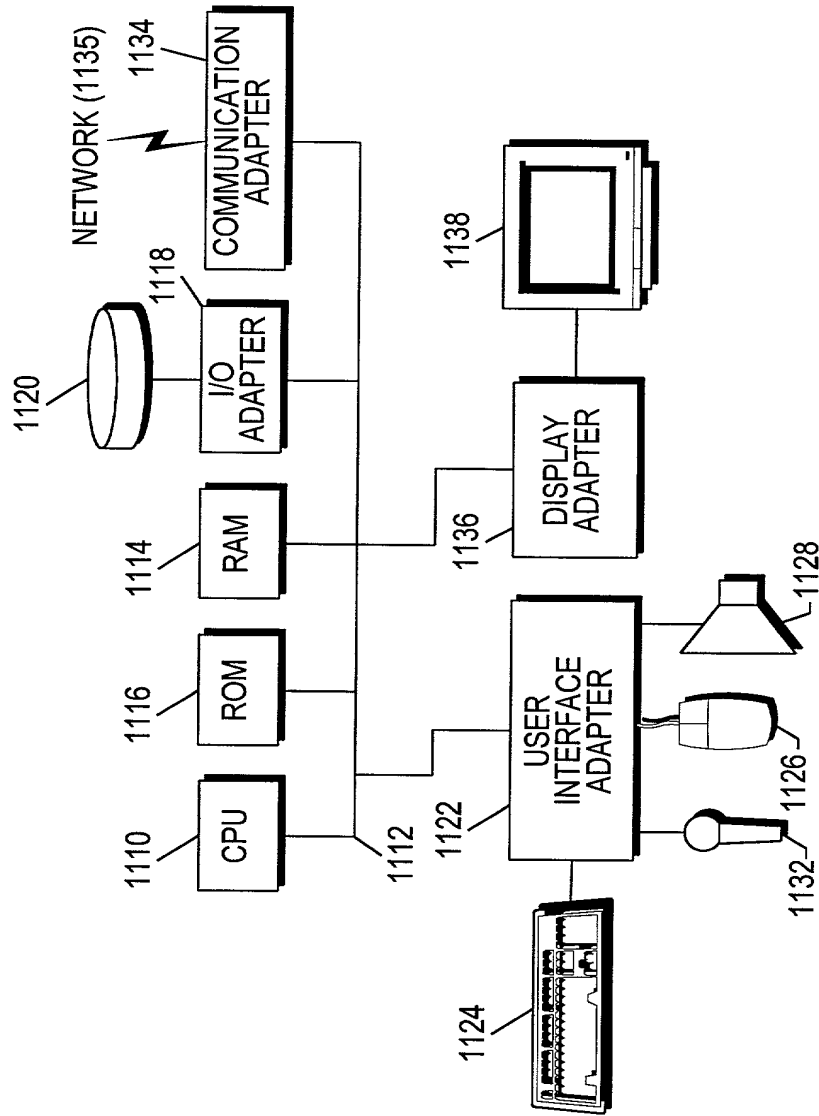


FIG. 11

EXPRESS MAIL NO.: EL563098659US

PATENT
Atty Docket No. 68139769-200100

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR FACILITATING USER INTERFACE ROAMING IN AN INTERFACE ROAMING NETWORK FRAMEWORK

the specification of which (check one) X is attached hereto or ___ was filed on ___ as Application No. ___ and was amended on ___ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

| Prior Foreign Application(s) | Priority Claimed | |
|-------------------------------------|------------------|----|
| | Yes | No |
| Number Country Day/Month/Year Filed | | |

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) below.

| Application Number | Filing Date |
|--------------------|-------------|
| | |

| Application Number | Filing Date |
|--------------------|-------------|
| | |

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

| Application Number | Filing Date | Status: Patented, Pending, Abandoned |
|--------------------|-------------|--------------------------------------|
| | | |

| Application Number | Filing Date | Status: Patented, Pending, Abandoned |
|--------------------|-------------|--------------------------------------|
| | | |

DECLARATION
6208824v1

- 1 -

Rev 04/20/00

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor CHRISTIAN VOLF OLGAARD


Inventor's signature  10/20/00
Date

Residence 366 W. Olive Ave., #1, Sunnyvale, CA 94086

Citizenship Danish

Post Office Address 366 W. Olive Ave., #1, Sunnyvale, CA 94086

Full name of second joint inventor, if any, SPIROS NIKOLAOS BOUAS

Inventor's signature  10.19.00
Date

Residence 925 Oak Lane, Apt. 3, Menlo Park, CA 94025

Citizenship Greek

Post Office Address 925 Oak Lane, Apt. 3, Menlo Park, CA 94025

Full name of third joint inventor, if any, RICH WILLIAM UMS TATTD

Inventor's signature  10/19/2000
Date

Residence 3940 Springfield Drive, San Jose, CA 95130

Citizenship U.S.A.

Post Office Address 3940 Springfield Drive, San Jose, CA 95130

Full name of fourth joint inventor, if any, BENNY MADSEN

Inventor's signature  10/19/2000
Date

Residence 551 Torwood Lane, Los Altos, CA 94022

Citizenship Danish

Post Office Address 551 Torwood Lane, Los Altos, CA 94022